



### Overview

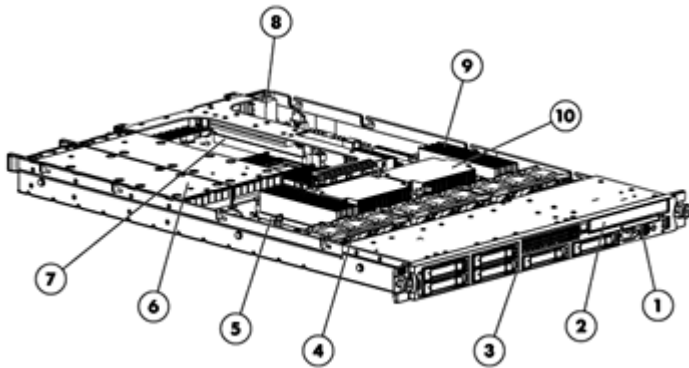

#### Front View:

1. Slide-out System Insight Display
2. Slimline removable media bay
3. Six SAS/SATA hot plug drive bays
4. Removable fans for easy serviceability
5. Choice of Smart Array P400i Controller or Smart Array E200i Controller
6. Redundant Hot Plug Power Supplies
7. Full length/height x8 PCI-Express Slot (optional PCI-X)
8. Low-profile x4 PCI-Express slot
9. Eight PC2-5300 667 MHz DDR2 DIMM slots
10. Up to two AMD Opteron™ processors

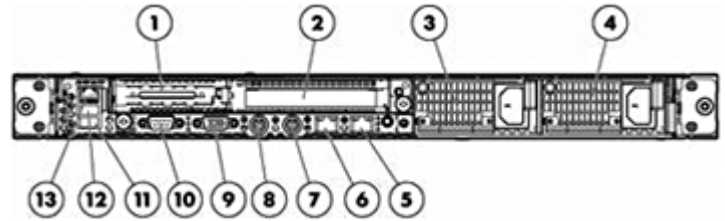

#### Rear View:

1. PCI Express expansion slot 1, low-profile, half-length
2. PCI Express expansion slot 2
3. Power supply bay 2
4. Power supply bay 1
5. NIC 2 connector
6. NIC 1 connector
7. Keyboard connector
8. Mouse connector
9. Video connector
10. Serial connector
11. USB connector
12. USB connector
13. iLO 2 NIC connector

### What's New

- 2.6 GHz 68 Watt processor now available (AMD Opteron™ Processor 2218 HE)

### At A Glance

Combining concentrated 1U compute power, integrated Lights-Out management, and essential fault tolerance, the HP ProLiant DL365 is optimized for space constrained installations. AMD Opteron dual-core processors, DDR2 memory, Serial Attached SCSI (SAS) and PCI Express technology provide a high performance system ideal for the full range of scale out applications. What's more, the HP ProLiant DL365 provides fault tolerant in an ultra dense platform with redundant power, redundant fans, embedded RAID capability, and full-featured remote Lights-Out management.

- **Processors:**
  - Up to (2) AMD Opteron™ 2200 Series dual-core processors, with 1MB L2 Cache per processor
- **Memory:**
  - Up to 32 GB of memory, supported by (8) slots of PC2-5300 DDR2 (667 MHz)
- **Storage Controller:**
  - Performance Models: HP Smart Array P400i/256MB Controller (RAID 0/1/5/6)
  - Base Models: HP Smart Array P400i/256MB Controller (RAID 0/1/5)

### Overview

- Entry Models: HP Smart Array E200i/64MB Controller (128MB BBWC optional)
- **Internal Drive Support:**
  - Up to (6) small form factor (SFF) hot-plug drive bays
  - Up to 876GB SAS with optional hard drives
  - Up to 720GB SATA with optional hard drives
  - Slimline media bay supporting DVD or CD drive
- **Network Controller:**
  - Two Embedded NC373i Multifunction Gigabit Server Adapters with TCP/IP Offload Engine, including support for Accelerated iSCSI through optional ProLiant Essentials Licensing Kits
- **Expansion Slots:**
  - Two PCI-Express expansion slots: (1) full-length, full-height slot; (1) low-profile slot
  - Front or rear accessible video port
- **USB 2.0 Ports:**
  - 4 Total: (1) front, (1) internal and (2) rear accessible ports
- **Redundancy:**
  - Multiple layers of fault tolerance through critical component redundancy (power supply and fan redundancy), embedded RAID capability, and full-featured remote Lights-Out management
- **Management:**
  - Integrated Lights-Out 2 featuring Integrated Remote Console with KVM over IP performance over shared network access
  - Convenient slide-out Systems Insight Display for quick and easy front view server diagnostics
  - ProLiant Essential Foundation Pack standard, including HP Systems Insight Manager, SmartStart, SmartStart Scripting Toolkit, Subscriber's Choice and ROM Based Setup Utility (RBSU)
  - Automatic Server Recovery (ASR), ROM Based Setup Utility (RBSU), HP System Insight Manager, Status LEDs including system health, UID, and SmartStart
- **Form Factor:**
  - 1U Rack form factor (1.75"), less than 28 in (70.5 cm) deep
- **Deployment/Serviceability:**
  - Sliding rails for in rack servicing ship standard; optional 1U Cable Management Arm
- **Warranty:**
  - Protected by HP Services and a worldwide network of resellers and service providers. Three-year next business day, on-site limited global warranty. Certain restrictions and exclusions apply. Pre-failure notification on processors, memory, and SAS hard drives. SATA hard drives have a one-year warranty.

Standard Features

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

<b>Processor</b> One of the following depending on Model	AMD Opteron™ Processor 2220 (2.8 GHz, 95 Watts)
	AMD Opteron™ Processor 2218 (2.6 GHz, 95 Watts)
	AMD Opteron™ Processor 2218 HE (2.6 GHz, 68 Watts)
	AMD Opteron™ Processor 2216 (2.4 GHz, 95 Watts)
	AMD Opteron™ Processor 2216 HE (2.4 GHz, 68 Watts)
	AMD Opteron™ Processor 2214 HE (2.2 GHz, 68 Watts)
	AMD Opteron™ Processor 2210 (1.8 GHz, 95 Watts)
	AMD Opteron™ Processor 2210 HE (1.8 GHz, 68 Watts)

<b>Memory</b> One of the following depending on Model	Type	PC2-5300 DDR2 DIMMs (667 MHz)
	Standard (Entry or Base Models)	1 GB (2 x 512 MB)
	Standard (Performance Models)	2 GB (4 x 512 MB)
	Maximum	32 GB (8 x 4 GB)
<b>NOTE:</b> DIMMs must be installed in decreasing capacity with the largest DIMM installed in the banks furthest away from each processor.		

<b>Network Controller</b>	Two Embedded NC373i Multifunction Gigabit Server Adapters with TCP/IP Offload Engine, including support for Accelerated iSCSI through optional ProLiant Essentials Licensing Kits
---------------------------	---

Expansion Slots	Slot Number	Bus Speed	Bus Number*	Device Number**	Hot Plug	PCI Voltage
	1	x8 PCI Express	11	0	no	N/A
	2	x8 PCI Express	19	0	no	N/A
	2	64-bit/133MHz PCI-X (option)	16	1	no	3.3 Volt

**\*NOTE:** Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

**\*\*NOTE:** Slots are enumerated differently based on OS. Microsoft OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

**NOTE:** All slots can accept universal keyed PCI cards.

<b>Manageability</b>	Integrated Lights-Out (iLO 2) Management 2 (integrated on motherboard)
----------------------	--

### Standard Features

<b>Storage Controllers</b> <i>One of the following depending on Model</i>	Entry Models	HP Smart Array E200i/64MB Controller (RAID 0/1) <b>Available upgrade:</b> 128MB memory module with battery-backed write cache (BBWC) for RAID 0/1/5.
	Base and Performance Models	HP Smart Array P400i/256MB Controller (RAID 0/1/5) <b>Available upgrades:</b> Battery module or 512MB battery-backed write cache (BBWC) memory module. Both enable RAID 0/1/5/6 and write cache (BBWC).

<b>Storage</b>	Optical Drives (Slimline Drive bay)	Optional DVD-ROM, DVD/CD-RW Combo (standard in performance models), or DVD-RW
	Drive Bays	6 Small Form Factor bays total <b>NOTE:</b> 4 bays active in most models. Smart Array P400i controller and Mini-SAS storage cable (P/N 399546-B21) required for activation of 5th and 6th drive bays.

<b>Maximum Internal Storage Type</b>	Hot Plug Serial Attached SCSI (SAS)	876GB SAS	6 x 146GB SAS
	Hot Plug Serial ATA (SATA)	720GB SATA	6 x 120GB SATA

<b>Interfaces</b>	Keyboard	1
	Mouse	1
	Serial	1
	Video	1
	USB 2.0 Ports	2 rear, 1 front, 1 internal <b>NOTE:</b> Please see the following URL for additional information regarding USB support: <a href="http://h18004.www1.hp.com/products/servers/platforms/usb-support.html">http://h18004.www1.hp.com/products/servers/platforms/usb-support.html</a> .
	Network RJ-45	2
	iLO 2 remote management port	1

<b>Graphics</b>	Integrated ATI ES1000 1280 x 1024 x 16M color (32MB video standard)
-----------------	---

<b>Form Factor</b>	Rack (1U), (1.75 in/4.45 cm)
--------------------	------------------------------

<b>ProLiant Essentials Foundation Pack Software</b>	HP Systems Insight Manager	HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other infrastructure devices across multiple operating system platforms.
---	----------------------------	---

Through a single management view, HP SIM provides core management services that include device discovery and identification, event views, health monitoring, inventory data collection, software

### Standard Features

version control and reporting. HP SIM is built on industry standards and is extensible with value-added ProLiant Essentials, Integrity Essentials and Storage Essentials software to meet individual management needs. For more details on HP SIM visit <http://www.hp.com/go/hpsim>.

HP SIM provides organizations with the following benefits:

- Simplifies and consolidates infrastructure lifecycle management using task and query based functionality
- Provides the foundation for infrastructure automation and virtualization
- Enables IT management based on business processes not hardware platforms
- Lowers infrastructure maintenance cost and frees resources for innovation
- Maximizes resource utilization with virtualization technologies
- Provides a central point of integration between infrastructure and Enterprise management tools such as HP OpenView

#### SmartStart

SmartStart is a tool that simplifies server setup, providing a rapid way to deploy reliable and consistent server configurations. For more information, please visit the SmartStart Web site at <http://www.hp.com/servers/smartstart>.

SmartStart version supported (minimum): SmartStart 7.60.

#### Insight Management Agents

Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers,

Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack. For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at <http://www.hp.com/servers/manage>.

#### Subscriber's Choice

Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides automatic delivery of software and driver change notifications for ProLiant products. Sign up at <http://www.hp.com/go/subscriberschoice> and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis.

#### ROMPaq, support software, and configuration utilities

The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options available in SmartStart or downloadable from Software and Drivers download pages: <http://www.hp.com/go/support>

#### Insight Diagnostics

The most advanced configuration analysis, reporting and troubleshooting utilities used by HP and at your fingertips, available in SmartStart.

#### Optional ProLiant

Optional software offerings that selectively extend the functionality of an

### Standard Features

Essentials Value Packs Adaptive Infrastructure to address specific business problems and needs:

- Rapid Deployment Pack (RDP) is an automated deployment and provisioning solution for all ProLiant servers. RDP includes the ProLiant Integration Module featuring ProLiant server pre-configured events for OS installation, and optimized software drivers, firmware and management agents. Every RDP disc includes 7-day, 10-node trial licenses for evaluation purposes. RDP requires a license for each server deployed and is available for purchase with HP servers. For more information, visit: <http://www.hp.com/servers/rdp>.
- Workload Management Pack - provides easier management of complex environments, improving overall server utilization and enabling Windows® 2000 customers for the first time to confidently deploy multiple applications on a single multiprocessor ProLiant Server.
- Performance Management Pack - a performance management solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.
- Intelligent Networking Pack - detects and analyzes network bottlenecks or broken network linkages and steers traffic to the optimum route based on network conditions, plus it provides an extra layer of protection. The virus throttle feature of the solution slows the propagation of fast spreading virus
- Vulnerability and Patch Management Pack - identifies and remediates software security vulnerabilities due to missing patches as well operating system configurations that can be exploited by viruses, worms, and other blended threats
- Virtual Machine Management Pack - provides central management and control of virtual machines from Microsoft and VMware. Integrated approach provides the ability to manage both physical and virtual resources from a single management console.
- Server Migration Pack - The Server Migration Pack automates the manual processes required for migrating servers between physical or virtual platforms (P2V, V2P, and V2V).
- Server Migration Pack - P2P Edition: Upgrading or replacing your existing server? Effortlessly transition to new servers with automated, accurate and affordable migration of OS, application and data.
- Accelerated iSCSI Pack - enables the embedded Multifunction network controller to serve as both a NIC and an iSCSI HBA providing access to SAN storage over the same connection used for networking. Processing of the protocol stack is offloaded to the NIC reducing CPU utilization and greatly improving the speed with which the requests are processed and sent to the network.
- Remote Direct Memory Access (RDMA) Pack for Embedded Multifunction Gigabit Server Adapters - provides direct and faster communication between application buffers in separate servers for tasks that involves moving large amounts of data, such as network backups, database read/write, and high performance

Standard Features

Optional Remote Management Packs

- computing.
- Integrated Lights-Out Advanced Pack - upgrades the iLO 2 processor with comprehensive remote control including Virtual KVM remote graphical console, enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication).
  - Integrated Lights-Out Select Pack - upgrades the iLO 2 processor with enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication) for servers managed using remote consoles available in iLO 2 Standard and iLO 2 Standard Blade Edition.
  - Insight Power Manager (IPM) - upgrades the single-server remote management capabilities of iLO Select/Advanced to include centralized reporting and policy-based management of power consumption and thermal output provided by the Insight Power Manager. IPM unifies all of this functionality within a single user interface - HP Systems Insight Manager.

**NOTE:** Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

**NOTE:** For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessential>.

Industry Standard Compliance

- ACPI 1.0b Compliant
- PCI 2.3 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 1.1 and 2.0 supported





## Standard Features

### Remote Management Integrated Lights Out 2 (iLO2) Standard Management:

- Virtual Text Remote Console (pre-OS only)
- Remote Serial Console
- Virtual Power Button Control
- Virtual Unit ID control
- Integrated Remote Console
- Dedicated & full function shared network connectivity
- Embedded system health
- Browser, command line and scripted access
- Automatic IP Configuration via DHCP/DNS/WINS
- Industry Standard 128-bit Secure Sockets Layer (SSL) and Secure Shell security (SSH)
- OS independent hardware health status
- IML and iLO Event Logging
- Support for 12 user accounts with customizable access privilege

### Intelligent Manageability

HP Systems Insight Manager  
 SmartStart  
 ROM-Based Setup Utility (RBSU)  
 Remote-Flash Redundant ROM  
 Integrated Management Log (IML)  
 Server Health logging  
 Automatic Server Recovery-2 (ASR-2)  
 System Interconnect Status Indicators  
 Dynamic sector repairing and drive parameter tracking (with Smart Array controllers)  
 Power Down Utility  
 Pre-Failure Warranty

### Security

Power-on password  
 Keyboard password  
 Diskette drive control  
 Diskette boot control  
 QuickLock, Network Server Mode  
 Removable CD and Diskette Drive Assembly  
 Serial interface control  
 Administrator's password  
 Integrated Lights-Out has 12 customizable user accounts and SSL encryption  
 Integrated Lights-Out can be disabled via a Global Setting  
 iLO Advance Pack supports directory services integration and two-factor authentication

### Server Power Cords

High line cord ships standard with all part numbers. Localized cables included with geographic specific models in other world regions.  
**NOTE:** Low voltage 115V (wall outlet) power cords are no longer shipped with DL rack based servers.



### Standard Features

<b>UPS Power Cord Matrix</b>	Please see the UPS Power Cord Matrix for cable descriptions, requirements, and specifications for UPS units: <a href="http://ftp.compaq.com/pub/products/servers/proliantstorage/power-protection/powercordmatrix.pdf">ftp://ftp.compaq.com/pub/products/servers/proliantstorage/power-protection/powercordmatrix.pdf</a> .
<b>Power Supply</b>	700W, Optional (1+ 1 redundant) power supply <b>NOTE:</b> PN 399542-B21 contains the optional power supply and an IEC power cable only; purchase if connecting to PDU/UPS that supports IEC cables. PN 399542-291 includes IEC power cable and a Japan power cable. PN 399542-AA1 includes IEC power cable and a China power cable.
<b>System Fans</b>	9 fans ship standard; N+1 fan redundancy standard
<b>Required Cabling</b>	For required cabling information, refer to the Web site at <a href="http://h18000.www1.hp.com/products/servers/proliantdl365/">http://h18000.www1.hp.com/products/servers/proliantdl365/</a> .
<b>OS Support</b>	Microsoft Windows Server 2003 Red Hat Enterprise Linux SUSE Linux Enterprise Server Solaris 10 32/64-bit VMware Virtualization Software  <b>NOTE:</b> For a more complete and up-to-date listing of supported OSs and versions, please visit our OS Support Matrix page at: <a href="http://www.hp.com/go/supportos">http://www.hp.com/go/supportos</a> . <b>NOTE:</b> For more complete and up-to-date information on how to buy server operating systems from HP please visit the OS product site at: <a href="http://h18004.www1.hp.com/products/servers/software/OEM.html">http://h18004.www1.hp.com/products/servers/software/OEM.html</a> <b>NOTE:</b> For a listing of the latest drivers available for the HP ProLiant DL365, please see: <a href="http://h18023.www1.hp.com/support/files/server/us/index.html">http://h18023.www1.hp.com/support/files/server/us/index.html</a> . <b>NOTE:</b> For more Linux OS support & certification information, please visit our the ProLiant & BladeSystem Server Linux matrix: <a href="http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html">http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html</a> <b>NOTE:</b> For more information on HP's Certified and Supported ProLiant Servers, please visit the VMware Server Support Matrix at: <a href="http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html">http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html</a> .

## Standard Features

### Rack Airflow Requirements

#### Rack 10000 series Cabinets

The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

**CAUTION:** If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:

- **Front and rear doors:** If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).
- **Side:** The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

**CAUTION:** Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

**NOTE:** For additional information, refer to the Setup and Installation Guide or the Documentation CD provided with the server, or to the server documentation located in the Support section at the following URL: <http://h18000.www1.hp.com/products/servers/proliantdl365/index.html>.

### Rack Kit

The HP ProLiant DL365 has universal sliding rails which provide tool-free support for square and round holes rack (including Compaq/HP 7000, 9000, 10000 and HP/E and H9 series), with an adjustment range from 24 3/4" - 36" depth.

### Telco Rack Support

Support for all 2-post Telco racks requires an additional option kit from Rack Solutions. The Rack Solutions brackets can be purchased at: <http://www.racksolutions.com/hp>.

### Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

### Standard Features

#### HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

<http://www.hp.com/products/configurator>.

#### HP ProLiant Smart Buys (NA only)

The HP Smart Buy program offers mainstream business solutions at competitive prices with excellent availability and superior HP quality. It offers a wide range of industry-leading HP products at compelling prices, allowing you to receive richer configurations with additional options.

**NOTE:** ProLiant Smart Buys are available in North America only. For detailed specification information on ProLiant Smart Buys please click on the following link:  
<ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>

#### Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

**NOTE:** Server Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support. Additional information regarding worldwide limited warranty and technical support is available at:  
<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

HP Care Pack services include coverage for the HP branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as 22" and smaller external monitors and tower UPS options up to 3kVA; these items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

HP services provide continuous care and support expertise with committed response designed to meet your IT and business needs.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Enhanced Care - Minimum recommended service support offer designed to ensure customers have access to expert assistance, whenever they need it.

- 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years

Continuous Care - Recommended service delivering cost-effective support options designed to extend HP Services committed response and guaranteed fix times, designed to speed problem identification and resolution.

### Standard Features

- *6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Total Care - Highest HP Support service level recommend to help increase IT performance and availability with comprehensive, integrated hardware and software services

- *Support Plus 24 - Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays*

Deployment Services - HP Installation and Start Up services designed to take time, risk, and worry out of the deployment of ProLiant servers - and free customers IT support staff to focus on what they do best, their business.

- *Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays*

**NOTE:** For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

### Models

**NOTE:** ProLiant Smart Buys are available in NA only. For detailed specification information on ProLiant Smart Buys please click on the following link: <ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>.

### Models

<b>HP DL365 Performance Processor(s)</b>		(2) AMD Opteron™ Processor 2220 (2.8 GHz, 95 Watts)
<b>Models</b>		(2) AMD Opteron™ Processor 2218 (2.6 GHz, 95 Watts)
<b>DL365 2220 2GB</b>		
439191-xx1	<b>Memory</b>	2 GB (4 x 512 MB) Standard; PC2-5300 DDR2 DIMMs (667 MHz)
	<b>Network Controller</b>	Two Embedded NC373i Multifunction Gigabit Server Adapters
<b>DL365 2218 2GB</b>	<b>Storage Controller</b>	Smart Array P400i/256MB BBWC (RAID 0/1/5/6)
411361-xx1	<b>Hard Drive</b>	No drives included; (6) drive bays active
	<b>Internal Storage</b>	Up to 876GB SAS; 720GB SATA
	<b>Optical Drive</b>	Slimline DVD/CD-RW Combo drive
	<b>PCI-Express Slots</b>	1 full-length x8 PCI-Express slot 1 low-profile x4 PCI-Express slot
	<b>Power Supplies</b>	(2) 700W power supplies, redundant
	<b>Fans</b>	9 total, redundancy standard
	<b>Form Factor</b>	Rack (1U), (1.75 in/4.45 cm)

<b>HP DL365 Base Models Processor(s)</b>		(1) AMD Opteron™ Processor 2218 (2.6 GHz, 95 Watts)
<b>Models</b>		(1) AMD Opteron™ Processor 2214 HE (2.2 GHz, 68 Watts)
<b>DL365 2218 1GB</b>		
411360-xx1	<b>Memory</b>	1 GB (2 x 512 MB) Standard; PC2-5300 DDR2 DIMMs (667 MHz)
<b>DL365 2214 1GB</b>	<b>Network Controller</b>	Two Embedded NC373i Multifunction Gigabit Server Adapters
411359-xx1	<b>Storage Controller</b>	Smart Array P400i Controller with 256MB cache (RAID 0/1/5)
	<b>Hard Drive</b>	No drives included; (4) drive bays active. (6) bays supported with optional storage cable (PN 399546-B21)
	<b>Internal Storage</b>	Up to 876GB SAS; 720GB SATA
	<b>Optical Drive</b>	Optional DVD, or DVD/CD-RW
	<b>PCI-Express Slots</b>	1 full-length x8 PCI-Express slot 1 low-profile x4 PCI-Express slot
	<b>Power Supply</b>	(1) 700W power supply, redundant optional
	<b>Fans</b>	9 total, redundancy standard
	<b>Form Factor</b>	Rack (1U), (1.75 in/4.45 cm)

Models

<b>HP DL365 Entry Model</b>  <b>DL365 2210 1GB</b> 411358-xx1	<b>Processor</b>	(1) AMD Opteron™ Processor 2210 (1.8 GHz, 95 Watts)
	<b>Memory</b>	1 GB (2 x 512 MB) Standard; PC2-5300 DDR2 DIMMs (667 MHz)
	<b>Network Controller</b>	Two Embedded NC373i Multifunction Gigabit Server Adapters
	<b>Storage Controller</b>	Smart Array E200i Controller (64MB; 128MB BBWC optional) (RAID 0/1 standard; RAID 5 with BBWC upgrade)
	<b>Hard Drives</b>	No drives included; (4) drive bays active
	<b>Internal Storage</b>	Up to 584GB SAS; 480GB SATA
	<b>Optical Drive</b>	Optional DVD, or DVD/CD-RW
	<b>PCI-Express Slots</b>	1 full-length x8 PCI-Express slot 1 low-profile x4 PCI-Express slot
	<b>Power Supply</b>	(1) 700W power supply, redundant optional
	<b>Fans</b>	9 total, N+1 redundancy standard
	<b>Form Factor</b>	Rack (1U), (1.75 in/4.45 cm)

Country Code Key		Rack Code Key
	XX=00	US
	XX=20	Brazil
	XX=29	Japan
	XX=37	APD
	XX=42	EURO
	XX=AA	PRC

### Configuration Information - Factory Integrated Models (North America only)

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

**NOTE:** For Configure to Order requirements within EMEA region, please consult local Sales Contact.

**NOTE:** HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

**NOTE:** This product offering does not support HP Factory Express Server Configuration Level 1.

**NOTE:** FIO indicates that this option is only available as a Factory Installable Option.

### Step 1: Base Configuration (choose one of the following configurable models)

<b>Models</b>	HP ProLiant DL365 Rack CTO Chassis (North America)	411377-B21
	<b>Factory Integrated Model ships with:</b>	
	Two Embedded NC373i Multifunction Gigabit Server Adapters	
	Integrated Lights-Out 2 (iLO 2) embedded	
	1 full-length and 1 low-profile x8 PCI-Express slots	
	9 fans; N+1 fan redundancy	
	(1) 700W power supply, redundant optional	
	Rack (1U), (1.75 in/4.45 cm)	

### Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

<b>Processors</b>	AMD Opteron™ Processor 2220 (2.8 GHz, 95 Watts), FIO	439189-L21
	AMD Opteron Processor 2218 (2.6 GHz, 95 Watts) , FIO	411362-L21
	AMD Opteron Processor 2218 HE (2.6 GHz, 68 Watts) , FIO	439188-L21
	AMD Opteron Processor 2216 (2.4 GHz, 95 Watts) , FIO	411365-L21
	AMD Opteron Processor 2216 HE (2.4 GHz, 68 Watts) , FIO	419487-L21
	AMD Opteron Processor 2214 HE (2.2 GHz, 68W) , FIO	411368-L21
	AMD Opteron Processor 2210 (1.8 GHz, 95 Watts) , FIO	411374-L21
	AMD Opteron Processor 2210 HE (1.8 GHz, 68 Watts) , FIO	434933-L21
<b>Base Memory</b>	1 GB PC2-5300 DDR2 2 x 512 MB Kit	408850-B21
	2 GB PC2-5300 DDR2 2 x 1 GB Kit	408851-B21
	4 GB PC2-5300 DDR2 2 x 2 GB Kit	408853-B21
	8 GB PC2-5300 DDR2 2 x 4 GB Kit	408854-B21
<b>Storage Controllers</b>	HP E200i Controller FIO	399548-B21
	<b>NOTE:</b> If selected, must choose one of the cache modules below.	
	HP Smart Array E200 64MB FIO Cache	405102-B21
	<b>NOTE:</b> Supports Smart Array E200 Controller only.	
	128MB Battery Backed Write Cache Enabler Option Kit	346914-B21
	<b>NOTE:</b> Supports Smart Array E200i Controller.	
	Smart Array P400i Controller	413741-B21
	<b>NOTE:</b> If selected, must choose one of the two cache modules below.	
	HP Smart Array P400 256MB FIO Cache	405139-B21
	<b>NOTE:</b> Supports Smart Array P400 Controller and Smart Array P400i Controller only.	



Configuration Information - Factory Integrated Models (North America only)

512MB Battery-backed cache upgrade	405148-B21
<b>NOTE:</b> Supports Smart Array P400 Controller and Smart Array P400i Controller only.	
HP Smart Array P600/256 BBWC Controller	337972-B21
<b>NOTE:</b> Requires PCI-X Riser option (PN 405154-B21).	
<b>NOTE:</b> Requires HP SAS 4i to Mini SAS 4i 31 inch/.79 meter cable (PN 411100-B21).	

Step 3: Choose Additional Factory Integratable Options

Performance Packs	The HP ProLiant DL365 performance pack is necessary to configure a HP ProLiant DL365 Performance Model. HP ProLiant DL365 Performance model includes the latest performance technologies and enterprise class availability features pre-installed for convenience and value. The performance pack includes a 2nd processor, redundant power supplies, Smart Array P400i Controller with 256MB of BBWC, and storage cable to enable the all 6 disk drive bays.	
	HP DL365 X2218 HPM FIO Perf Pack	432052-B21
	HP DL365 X2220 HPM FIO Perf Pack	440812-B21

Step 4: Choose Additional Options for Factory Integration

**NOTE:** For additional options, please refer to the "Options" section below.

### Options

**NOTE:** Some options may not be factory integratable. Contact your local sales representative for additional information.

<b>HP ProLiant DL365 Unique Options</b>	AMD Opteron™ Processor 2220 (2.8 GHz, 95 Watts)	439189-B21
	AMD Opteron™ Processor 2218 (2.6 GHz, 95 Watts)	411362-B21
	AMD Opteron™ Processor 2218 HE (2.6 GHz, 68 Watts)	439188-B21
	AMD Opteron™ Processor 2216 (2.4 GHz, 95 Watts,)	411365-B21
	AMD Opteron™ Processor 2216 HE (2.4 GHz, 68 Watts)	419487-B21
	AMD Opteron™ Processor 2214 HE (2.2 GHz, 68W)	411368-B21
	AMD Opteron™ Processor 2210 (1.8 GHz, 95 Watts)	411374-B21
	AMD Opteron™ Processor 2210 HE (1.8 GHz, 68 Watts)	434933-B21
	PCI-X Riser option	405154-B21
<b>NOTE:</b> To convert full-length PCI-Express slot to PCI-X slot.		

<b>ProLiant Essentials Value Pack Software</b>	<b>ProLiant Essentials Accelerated iSCSI Pack</b>	
	ProLiant Essentials Accelerated iSCSI Pack, 1 License	407484-B22
	<b>NOTE:</b> For additional Accelerated iSCSI Pack License Kits, please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12466_div/12466_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12466_div/12466_div.HTML</a>	
	<b>ProLiant Essentials Intelligent Networking Pack</b>	
	ProLiant Essentials Intelligent Networking Pack, Windows Edition, Single Server License	436225-B21
	<b>NOTE:</b> For use with a single server. Contains one license with a unique license activation key and documentation.	
	<b>NOTE:</b> For additional ProLiant Intelligent Networking Pack License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12062_div/12062_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12062_div/12062_div.HTML</a>	
	ProLiant Essentials Intelligent Networking Pack – Linux Edition, Single Server License	436229-B21
	<b>NOTE:</b> For additional ProLiant Intelligent Networking Pack – Linux License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12327_div/12327_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12327_div/12327_div.HTML</a>	
	<b>ProLiant Essentials Performance Management Pack</b>	
	ProLiant Essentials Performance Management Pack, Single-Server License	306696-B21
	<b>NOTE:</b> For use with a single server. Contains one license with a unique license activation key, HP Management CD and documentation.	
	<b>NOTE:</b> The most recent version of the software can always be downloaded at <a href="http://www.hp.com/products/pmp">http://www.hp.com/products/pmp</a> .	
	<b>NOTE:</b> For additional ProLiant Performance Management Pack License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11925_div/11925_div.HTML">http://h18000.www1.hp.com/products/quickspecs/11925_div/11925_div.HTML</a>	
	<b>ProLiant Essentials Rapid Deployment Pack</b>	
	Rapid Deployment Pack, Single-Server License	267196-B21
	<b>NOTE:</b> This license allows 1 server to be deployed and managed via RDP.	
	Rapid Deployment Pack, Single-Server License (Japan)	267196-291
	<b>NOTE:</b> This license allows 1 server to be deployed and managed via RDP.	
	ProLiant Essentials Rapid Deployment Pack, Flatpack - single server license	434560-B21

## Options

ProLiant Essentials Rapid Deployment Pack - Physical Media Kit 434559-B21

**NOTE:** For additional ProLiant Essentials Rapid Deployment Pack License Kits please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/11053\\_div/11053\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/11053_div/11053_div.HTML)

### ProLiant Essentials Workload Management Pack

ProLiant Essentials Workload Management Pack, Single Server License 303284-B21

**NOTE:** For additional ProLiant Workload Management Pack License Kits please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/11452\\_div/11452\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/11452_div/11452_div.HTML)

### ProLiant Essentials Virtualization Management Software

ProLiant Essentials Virtual Machine Management Pack, Single-Server License 435661-B21

**NOTE:** For use with a single server. Contains one license with a unique license activation key and documentation.

HP ProLiant Essentials Virtual Machine Management and Server Migration Pack, Media Only 442213-B21

ProLiant Essentials Server Migration Pack, Single-Migration License 435663-B21

**NOTE:** Contains one license, enabling 1 server migration, with a unique license activation key and documentation.

ProLiant Essentials Server Migration Pack - P2P Edition, 1 Year Unlimited Migration License - License Only, No Media 444762-B21

**NOTE:** For additional ProLiant Essentials Virtualization Management Software License Kits please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/12328\\_div/12328\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12328_div/12328_div.HTML)

**NOTE:** This license allows 1 server to be migrated from a physical server to a virtual machine. Or this license can be used to migrate a virtual machine from one virtualization layer i.e. VMware GSX to a different virtualization layer such as VMware ESX or Microsoft Virtual Server 2005.

### HP ProLiant Essentials Remote Directory Memory Access (RDMA) Pack

HP ProLiant Essentials RDMA Pack for Embedded Multifunction Gigabit Server Adapters, 1 License 407478-B22

HP ProLiant Essentials RDMA Pack for Standup Multifunction Gigabit Server Adapters, 1 License 407481-B22

**NOTE:** For additional ProLiant Essentials RDMA Pack License Kits please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/12573\\_div/12573\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12573_div/12573_div.HTML)

### ProLiant Essentials Physical to ProLiant Edition

ProLiant Essentials Server Migration Pack – Physical to ProLiant Edition, Single-Migration License 412978-B21

**NOTE:** For additional ProLiant Essentials Server Migration License Kits please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/12467\\_div/12467\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12467_div/12467_div.HTML)

### ProLiant Essentials Vulnerability and Patch Management Pack

ProLiant Essentials Vulnerability and Patch Management Pack, Single-Server License 371645-B21

**NOTE:** For use with a single server. Contains one license with a unique license activation key and documentation.

## Options

**NOTE:** For additional ProLiant Vulnerability and Patch Management Pack License Kits, please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/12111\\_div/12111\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12111_div/12111_div.HTML)

**NOTE:** Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

**NOTE:** For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>.

Remote Management	<b>Integrated Lights-Out Advanced Pack</b>	
	Integrated Lights-Out Advanced Pack, 1 server	263825-B21
	<b>Featuring:</b> Sophisticated virtual administration features for ultimate control of servers in the data centers and remote sites.	
	<b>Integrated Lights-Out Select Pack</b>	
	Integrated Lights-Out Select Pack, 1 server License	413119-B21
	<b>NOTE:</b> For additional Integrated Lights-Out 2 License Kits please see the QuickSpecs at:	
	<a href="http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.HTML</a>	
	<b>HP Insight Power Manager (IPM)</b>	
	HP Insight Power Manager Pack, No Media, Single-Server License	433691-B21
	<b>NOTE:</b> This option kit includes 1 license for Insight Power Manager.	
	<b>NOTE:</b> For additional ProLiant Insight Power Manager Kits please see the QuickSpecs at:	
	<a href="http://h18000.www1.hp.com/products/quickspecs/12623_div/12623_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12623_div/12623_div.HTML</a>	
ProLiant Software Maintenance Subscription	ProLiant Software Maintenance Single Release	356573-B21
	ProLiant Foundation Pack Single Release	356604-B21
	<b>NOTE:</b> Please see the SmartStart QuickSpecs for additional information regarding the subscription purchase:	
	<a href="http://h18000.www1.hp.com/products/quickspecs/Division/11073.html">http://h18000.www1.hp.com/products/quickspecs/Division/11073.html</a> (Worldwide)	
Processor	AMD Opteron™ Processor 2220 (2.8 GHz, 95 Watts)	439189-B21
	AMD Opteron™ Processor 2218 (2.6 GHz, 95 Watts)	411362-B21
	AMD Opteron™ Processor 2218 HE (2.6 GHz, 68 Watts)	439188-B21
	AMD Opteron™ Processor 2216 (2.4 GHz, 95 Watts,)	411365-B21
	AMD Opteron™ Processor 2216 HE (2.4 GHz, 68 Watts)	419487-B21
	AMD Opteron™ Processor 2214 HE (2.2 GHz, 68W)	411368-B21
	AMD Opteron™ Processor 2210 (1.8 GHz, 95 Watts)	411374-B21
	AMD Opteron™ Processor 2210 HE (1.8 GHz, 68 Watts)	434933-B21

### Options

<b>Memory</b> (DIMMs)	1 GB PC2-5300 DDR2 2 x 512 MB Kit	408850-B21
	2 GB PC2-5300 DDR2 2 x 1 GB Kit	408851-B21
	4 GB PC2-5300 DDR2 2 x 2 GB Kit	408853-B21
	8 GB PC2-5300 DDR2 2 x 4 GB Kit	408854-B21

<b>Optical Drives</b>	Slimline CD-RW/DVD-ROM Combo Option Kit	331903-B21
	Slimline DVD-ROM Drive (8X/24X) Option Kit	264007-B21
	HP DVD±R/RW 8X Slim	383975-B21
	Slimline CD-ROM Drive 24X	356963-B21

<b>Hard Drives</b>	<b>Serial Attached SCSI (SAS) SFF Hot Plug</b>	
	HP 146GB 3G SAS 10K SFF SP HDD	431958-B21
	HP 72GB 3G SAS 10K SFF SP HDD	375861-B21
	HP 72GB 3G SAS 15K SFF SP HDD	431935-B21
	HP 36GB 3G SAS 10K SFF SP HDD	375859-B21
	HP 36GB 3G SAS 15K SFF SP HDD	431933-B21

**NOTE:** Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

[http://h18000.www1.hp.com/products/quickspecs/12244\\_div/12244\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.HTML)  
(Worldwide)

#### SFF SATA Hot Plug

HP 120GB 1.5G SATA 5.4K SFF HDD	431786-B21
HP 60GB 1.5G SATA 5.4K SFF HDD	379306-B21

**NOTE:** SATA drives have a 1 year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

[http://h18000.www1.hp.com/products/quickspecs/11940\\_div/11940\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.HTML)  
(Worldwide)

<b>Storage Controllers</b>	<b>SAS Controllers</b>	
	<b>Smart Array E200 Controller</b>	
	128MB Battery Backed Write Cache Enabler Option Kit	346914-B21
	<b>NOTE:</b> Supports Smart Array E200 Controller.	
	<b>Smart Array E500 Controller</b>	
	Smart Array E500/256MB Controller	435129-B21
	<b>Smart Array P400 Controller</b>	
	HP Smart Array P400i/256MB Controller	399550-B21
	Battery-backed write cache upgrade	383280-B21
	<b>NOTE:</b> For Smart Array P400 Controller and Smart Array P400i Controller only.	
	512MB Battery-backed cache upgrade	405148-B21
	<b>NOTE:</b> For Smart Array P400 Controller and Smart Array P400i Controller only.	



## Options

**NOTE:** Please see the following Controller QuickSpecs for additional information:

[http://h18000.www1.hp.com/products/quickspecs/12460\\_div/12460\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.HTML)  
(Smart Array E200 Controller)

[http://h18000.www1.hp.com/products/quickspecs/12700\\_div/12700\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12700_div/12700_div.HTML)  
(Smart Array E500 Controller)

[http://h18000.www1.hp.com/products/quickspecs/12400\\_div/12400\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12400_div/12400_div.HTML)  
(Smart Array P400 Controller)

### SAS HBA

HP SC44Ge Host Bus Adapter 416096-B21

HP 8 Internal Port SAS HBA with RAID 347786-B21

**NOTE:** Supports SAS and SATA disk drive. RAID 0,1 supported.

**NOTE:** Please see the following QuickSpecs for additional information:

[http://h18004.www1.hp.com/products/quickspecs/12617\\_div/12617\\_div.html](http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html)  
(SC44Ge HBA)

[http://h18004.www1.hp.com/products/quickspecs/12332\\_div/12332\\_div.html](http://h18004.www1.hp.com/products/quickspecs/12332_div/12332_div.html)  
(SAS HBA)

### SAS Cables

HP Mini SAS 4i 13.4 inch/0.35 m cable 399546-B21

**NOTE:** Used to connect Smart Array P400i to DL365 5th and 6th drive bays.

HP SAS 4i to Mini SAS 4i 31 inch/.79 meter cable 411100-B21

**NOTE:** Used to connect SA-P600, SA-P400, SA-E200 Controllers to the HP ProLiant DL360 G5 drive backplane. This kit supports all six drive bays.

### SCSI Controllers for External Drive/Storage Support

Smart Array 6402/128 Controller 273915-B21

**NOTE:** For support of external drives only.

Smart Array 6404/256 Controller 273914-B21

**NOTE:** For support of external drives only.

512 MB Battery-Backed Cache Upgrade 372538-B21

**NOTE:** This 512-MB Battery-Backed Cache Module upgrade kit supports the Smart Array P600 Controller and the Smart Array 6400 series Controller.

64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 374654-B21

### SCSI HBA

HP SC11Xe Host Bus Adapter 412911-B21

**NOTE:** Please see the QuickSpecs for additional information:

[http://h18000.www1.hp.com/products/quickspecs/10429\\_div/10429\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/10429_div/10429_div.HTML)  
(SCSI Adapter)

[http://h18000.www1.hp.com/products/quickspecs/11555\\_div/11555\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/11555_div/11555_div.HTML)  
(U320 Adapter)

[http://h18000.www1.hp.com/products/quickspecs/11943\\_div/11943\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/11943_div/11943_div.HTML)  
(U320 SCSI HBA)

[http://h18000.www1.hp.com/products/quickspecs/12566\\_div/12566\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.HTML)  
(SC11Xe HBA)

### Options

<b>Communications</b>	HP NC110T PCI Express Gigabit Server Adapter	434905-B21
	HP NC150T PCI 4-port Gigabit 1000T Combo Switch Adapter	367132-B21
	HP NC310F PCI-X 1000SX Gigabit Server Adapter	368169-B21
	HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
	HP NC364T PCI Express Quad Port Gigabit Server Adapter	435508-B21
	HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
	HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
	HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter	394795-B21
	HP NC510F PCIe 10 Gigabit Server Adapter	414126-B21
	<b>NOTE:</b> A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510F adapter.	
	HP NC510C PCIe 10 Gigabit Server Adapter	414129-B21
	<b>NOTE:</b> A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510C adapter.	
	HP IB 4X SDR PCI-e single PORT HCA	431038-B21
	HP IB 4X DDR PCI-e Single PORT HCA	431039-B21
	HP NC7771 PCI-X 1000T Gigabit Server Adapter	290563-B21

<b>Redundant Power Supply</b>	700W HP redundant power supply with IEC cord only	399542-B21
	700W HP redundant power supply with IEC cord and Japan cord (Japan)	399542-291

### Tape Drives

**NOTE:** For the complete listing of Tape Drive offerings, please see:  
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

For recommended tape drive offerings for this ProLiant server see the following:

#### USB Tape Drives

HP StorageWorks 1U USB Rack-Mount Kit with one DAT 72 USB Tape Drive	AG594A
--	--------

#### SAS Tape Drives

**NOTE:** Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

HP StorageWorks Ultrium 448 SAS Internal Tape Drive	DW085A
---	--------

**NOTE:** HP recommends combining this tape drive with the 1U SAS Rack-Mount kit (AE459A) for a complete rack-mount solution.

HP StorageWorks Ultrium 920 SAS Internal Tape Drive	EH847A
---	--------

**NOTE:** HP recommends combining this tape drive with the 1U SAS Rack-Mount kit (AE459A) for a complete rack-mount solution.

**NOTE:** Please refer to the "Tape Drives, Tape Autoloaders & Tape Libraries" table in the Storage section of this document for a list of SAS controllers with tape support.

#### Ultrium Tape Drives



## Options

HP StorageWorks Ultrium 232 Internal Tape Drive (Carbonite) DW064A

**NOTE:** HP recommends combining this tape drive with the 1U SCSI Rack-Mount kit (A7445B) for a complete rack-mount solution.

HP StorageWorks 1U Rack-mount kit with one Ultrium 448 (Carbonite) DW028B

HP StorageWorks 1U SCSI Rack-mount kit with one Ultrium 920 EH903A

**NOTE:** Please see the HP StorageWorks Ultrium Tape Drive QuickSpecs for additional options such as controllers, media, and other related items:

[http://h18006.www1.hp.com/products/quickspecs/11739\\_div/11739\\_div.html](http://h18006.www1.hp.com/products/quickspecs/11739_div/11739_div.html)  
(Worldwide)

[http://h18006.www1.hp.com/products/quickspecs/12128\\_div/12128\\_div.html](http://h18006.www1.hp.com/products/quickspecs/12128_div/12128_div.html)  
(Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>

### External DAT Drives

HP StorageWorks DAT 72 SCSI Internal Tape Drive (Carbon) Q1522B

**NOTE:** HP recommends combining this tape drive with the 1U SCSI Rack-Mount kit (A7445B) for a complete rack-mount solution.

**NOTE:** Please see the DAT Tape Drive QuickSpecs for controllers, media, and other options:

[http://h18000.www1.hp.com/products/quickspecs/11883\\_div/11883\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/11883_div/11883_div.HTML)  
(Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP DAT drives, please visit: <http://www.hp.com/go/connect>

### Rack-Mount Tape Drive Enclosures

HP StorageWorks 1U SCSI Rack-Mount kit A7445B

**NOTE:** The 1U Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with multiple Single-Ended and LVD SCSI tape drives including the DAT 24, DAT 40, DAT 72, DLT VS80, DLT VS160, Ultrium 215, Ultrium 232, Ultrium 448 and Ultrium 920 tape drives.

HP StorageWorks 1U USB Rack-Mount Kit A8007A

**NOTE:** The 1U USB Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the DAT 24 USB, DAT 40 USB and DAT 72 USB tape drives.

HP StorageWorks 1U SAS Rack-Mount Kit AE459A

**NOTE:** The 1U SAS Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the Ultrium 448 SAS and Ultrium 920 SAS tape drives.

**NOTE:** Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

**NOTE:** Please see the Rack-Mount Tape Drive Kits QuickSpecs for additional information regarding these kits:

[http://h18000.www1.hp.com/products/quickspecs/10854\\_div/10854\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/10854_div/10854_div.HTML)  
(Worldwide)

## Options

<b>HP D2D Backup System</b>	HP StorageWorks D2D110 Backup System	EH880A
	<b>NOTE:</b> 1TB of Disk Storage.	
	HP StorageWorks D2D110 Backup System with Data Protector Express Software Kit	EH923A
	<b>NOTE:</b> 1TB of Disk Storage.	
	HP StorageWorks D2D120 Backup System	EH884A
	<b>NOTE:</b> 2TB of Disk Storage.	
	HP StorageWorks D2D120 Backup System with Data Protector Express Software Kit	EH924A
	<b>NOTE:</b> 2TB of Disk Storage.	
	<b>NOTE:</b> Please see the HP D2D Backup Systems QuickSpecs for additional information: <a href="http://h18000.www1.hp.com/products/quickspecs/12651_div/12651_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12651_div/12651_div.HTML</a> (Worldwide)	

<b>Tape Autoloaders</b>	<b>HP StorageWorks DAT Autoloader</b>	
	HP StorageWorks DAT 72x10 tape autoloader	AE313B
	<b>HP StorageWorks 1/8 Tape Autoloader</b>	
	HP StorageWorks 1/8 Ultrium 960 Tape Autoloader	AF204A
	HP StorageWorks 1/8 G2 Ultrium 920 SAS Autoloader	AH558A
	HP StorageWorks 1/8 Ultrium 920 G2 Tape Autoloader	AH165A
	HP StorageWorks 1/8 Ultrium 448 G2 Tape Autoloader	AH164A
	HP StorageWorks 1/8 Ultrium 232 G2 Tape Autoloader	AH163A
	HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit	AH166A
	<b>NOTE:</b> Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions	
	1/8 Tape Autoloader Rackmount Kit	C9268R
	<b>NOTE:</b> Required to install the 1/8 tape autoloader in a standard 19-inch rack.	
	<b>NOTE:</b> Please reference the Tape Autoloader QuickSpecs at <a href="http://www.hp.com/go/automation">http://www.hp.com/go/automation</a> for additional information needed to create a complete solution.	

## Options

### Tape Libraries

#### HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 Ultrium 960 Drive Library	AG115A
HP StorageWorks MSL2024 1 Ultrium 960 4GB FC Library	AG326B
HP StorageWorks MSL2024 1 Ultrium 920 SAS Drive Library	AH559A
HP StorageWorks MSL2024 1 Ultrium 920 Drive Library	AH169A
HP StorageWorks MSL2024 2 Ultrium 920 Drive Library	AH170A
HP StorageWorks MSL2024 1 Ultrium 448 Drive Library	AG116A
HP StorageWorks MSL2024 2 Ultrium 448 Drive Library	AG117A

#### HP StorageWorks MSL4048 Tape Library

HP StorageWorks MSL4048 1 Ultrium 448 Drive Library	AG320A
HP StorageWorks MSL4048 2 Ultrium 448 Drive Library	AG321A
HP StorageWorks MSL4048 1 Ultrium 920 SAS Drive Library	AH560A
HP StorageWorks MSL4048 1 Ultrium 920 Drive Library	AH171A
HP StorageWorks MSL4048 2 Ultrium 920 Drive Library	AH172A
HP StorageWorks MSL4048 1 Ultrium 960 Drive Library	AG322A
HP StorageWorks MSL4048 1 Ultrium 960 4GB FC Library	AG324B
HP StorageWorks MSL4048 2 Ultrium 960 Drive Library	AG323A
HP StorageWorks MSL4048 2 Ultrium 960 4GB FC Library	AG325B

#### HP StorageWorks MSL8096 Tape Library

HP StorageWorks MSL8096 2 Ultrium 920 SAS Drive Library	AH561A
HP StorageWorks MSL8096 2 Ultrium 960 4GB FC Library	AH218A
HP StorageWorks MSL8096 2 Ultrium 960 Drive Library	AH219A

#### HP StorageWorks MSL6000 Tape Library

##### Ultrium 960 technology

HP StorageWorks MSL6030 1 Ultrium 960 Dr LVDS Library	AD606B
HP StorageWorks MSL6030 1 Ultrium 960 Dr FC Library	AD608B
HP StorageWorks MSL6030 2 Ultrium 960 Dr LVDS Library	AD607B
HP StorageWorks MSL6030 2 Ultrium 960 Dr FC Library	AD609B

##### Ultrium 460 technology

HP StorageWorks MSL6030 1 Ultrium 460 Dr LVDS Library	AD598B
HP StorageWorks MSL6030 1 Ultrium 460 Dr FC Library	AD600B
HP StorageWorks MSL6030 2 Ultrium 460 Dr LVDS Library	AD599B
HP StorageWorks MSL6030 2 Ultrium 460 Dr FC Library	AD601B

**NOTE:** Please reference the MSL2024, MSL4048 and MSL6000 Tape Library QuickSpecs at <http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at <http://www.hp.com/go/ebs>.

### Options

#### Power Cords

**NOTE:** The HP ProLiant DL365 ships with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs).

Nema 5-15P to IEC320-C13	AF556A
Power Cord, Euro, 10A 250 V Straight (12 ft/3.7 m)	157215-021
Power Cord, UK, 10A 250 V Straight (12 ft/3.7 m)	157216-031
Power Cord, Danish, 10A 250 V Straight (12 ft/3.7 m)	157218-081
Power Cord, Swiss, 10A 250 V Straight (12 ft/3.7 m)	157219-111
Power Cord, Italian, 10A 250 V Straight (12 ft/3.7 m)	157217-061
Power Cord, South Africa, 10A 250 V Straight (12 ft/3.7 m)	157220-AR1

#### StorageWorks Options **StorageWorks Fibre Channel HBA**

**NOTE:** For the complete listing of Fibre Channel Host Bus Adapters for Windows 2000, Windows Server 2003 and Linux, please see:

<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

HP StorageWorks FC2142SR 4Gb PCI-e HBA	A8002A
HP StorageWorks FC2242SR Dual Channel 4 Gb PCI-e HBA	A8003A
HP StorageWorks FC1142SR 4Gb PCI-e HBA	AE311A
HP StorageWorks FC1242SR Dual Channel 4 Gb PCI-e HBA	AE312A
HP StorageWorks FC2143 4Gb PCI-X 2.0 -to-Fibre Channel HBA	AD167A
HP StorageWorks FC2243 Dual Channel 4Gb PCI-X 2.0 HBA	AD168A
HP StorageWorks FC1143 4Gb PCI-X 2.0 HBA	AB429A
HP StorageWorks FC1243 Dual Channel 4Gb PCI-X 2.0 HBA	AE369A

#### **StorageWorks SCSI HBA**

HP U320e SCSI Host Bus Adapter	AH627A
--------------------------------	--------

**NOTE:** Recommended Dual Channel Ultra320 SCSI Controller for connecting multi-drive MSL tape libraries to ProLiant servers.

#### HP StorageWorks Modular Smart Array 20

HP StorageWorks Modular Smart Array 20	335921-B21
--	------------

**NOTE:** Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies.

HP StorageWorks Modular Smart Array 20 Starter Kit	366172-B21
--	------------

**NOTE:** Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies. Includes Smart Array 6402/128 Controller.

**NOTE:** The Modular Smart Array Enclosure 20 Family supports the SATA 1.5Gb/s 3.5" Hot Plug Hard Drives.

## Options

HP StorageWorks Modular Smart Array 30	HP StorageWorks Modular Smart Array 30 SB	302969-B21
	<b>NOTE:</b> Rack-mountable 14 drive enclosure with single bus, redundant power supplies	
	HP StorageWorks Modular Smart Array 30 DB	302970-B21
	<b>NOTE:</b> Rack-mountable 14 drive enclosure with dual bus, redundant power supplies	
	<b>NOTE:</b> The Modular Smart Array Enclosure 30 Family supports the Wide Ultra3, Ultra320 Hot Plug Hard Drives.	
HP StorageWorks Modular Smart Array 50	HP StorageWorks Modular Smart Array 50 Enclosure	364430-B21
	<b>NOTE:</b> Please see the Modular Smart Array 50 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: <a href="http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.HTML</a> (Worldwide)	
HP StorageWorks Modular Smart Array 500	HP StorageWorks Modular Smart Array 500 Generation 2	335880-B21
	<b>NOTE:</b> Please see the Modular Smart Array 500 Generation 2 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: <a href="http://h18000.www1.hp.com/products/quickspecs/11956_div/11956_div.HTML">http://h18000.www1.hp.com/products/quickspecs/11956_div/11956_div.HTML</a> (Worldwide)	
HP StorageWorks Modular Smart Array 1000	HP StorageWorks Modular Smart Array 1000	201723-B22
	<b>NOTE:</b> Please see the Modular Smart Array 1000 QuickSpecs for additional options and configuration information at: <a href="http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML">http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML</a> (Worldwide)	
HP StorageWorks Modular Smart Array 1500 cs	Modular Smart Array 1500 Controller Shelf	AA986A
	<b>NOTE:</b> Please see the StorageWorks Modular SAN Array 1500 cs QuickSpecs for additional options and configuration information at: <a href="http://www.hp.com/go/MSA1500cs">http://www.hp.com/go/MSA1500cs</a>	

## Options

Cluster Options	ProLiant Cluster Starter Kit	364023-B22
	<b>NOTE:</b> For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html">http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html</a> (Worldwide)	
	HP HA/F200 for Entry SAN Cluster	364026-B22
	<b>NOTE:</b> For additional information regarding the ProLiant Cluster for Entry Level SAN please see the following QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11932_div/11932_div.html">http://h18000.www1.hp.com/products/quickspecs/11932_div/11932_div.html</a> (Worldwide)	
	<b>NOTE:</b> For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: <a href="http://www.hp.com/solutions/highavailability/oracle">http://www.hp.com/solutions/highavailability/oracle</a>	
	HP Serviceguard for Linux ProLiant Cluster A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (2 node license cluster kit)	305199-B26
	HP Serviceguard for Linux A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (single license version)	307754-B26
	HP Serviceguard for Linux and Red Hat Global File System - 1 year subscription	T2798AA#001
	HP Serviceguard for Linux and Red Hat Global File System - 3 years subscription	T2798AA#003
	<b>NOTE:</b> For additional information regarding HP Serviceguard for Linux, please see the following QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html">http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html</a> (Worldwide)	
	<b>NOTE:</b> For configuration/certification options for HP Serviceguard for Linux please go to: <a href="http://www.hp.com/info/sglx">http://www.hp.com/info/sglx</a>	
Uninterruptible Power Systems – Rack Mountable	HP, R1.5kVA UPS, 1U, NA	AF419A
	HP, R1.5kVA UPS, 1U, INTL	AF418A
	HP, R1.5kVA UPS, 1U, JPN/TW	AF421A
	HP R3000 VA UPS, 2U, DTC, INTL	AF414A
	HP R3000 VA UPS, 2U, L5-30, NA	AF422A
	HP R3000 VA UPS, 2U, L6-20, NA	AF423A
	HP R3000 VA UPS, 2U, L6-20, JPN	AF424A
	HP R3000 VA UPS, 2U, L5-30, JPN	AF425A
	HP R5500 VA UPS, INTL	AF416A
	HP R5500 VA UPS, NA/JPN	AF426A

## Options

HP Monitored Power Distribution Unit (PDU)	HP Monitored Power Distribution Unit: Full Rack Version	
	17.3 kVA Monitored PDU Model S2324	AF503A
	8.6 kVA Monitored PDU Model S1324	AF504A
	16.6 kVA Monitored PDU Model S2140	AF505A
	8.3 kVA Monitored PDU Model S1140	AF506A
	22 kVA Monitored PDU Model S2316	AF507A
	11 kVA Monitored PDU Model S1316	AF508A
	14.7 kVA Monitored PDU Model S2132	AF509A
	7.3 kVA Monitored PDU Model S1132	AF510A
	4.9kVA Monitored PDU model S124	AF914A
	7.3kVA Monitored PDU model S132	AF915A

<b>Modular PDUs 1U/0U</b> (Up to 32 outlets) <b>NOTE:</b> 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).	Fixed Cord Extension Bars for 1U servers (2 PDU sticks per kit)	351655-B21
	3.6kVA Model - mPDU, 16A, High (WW)	252663-B24
	2.8 kVA Model - mPDU, 24A, Low (NA/JPN)	252663-D71
	4.9kVA Model - mPDU, 24A, High (NA/JPN)	252663-D72
	7.3kVA Model - mPDU, 32A, High (INT'L)	252663-B31
	8.3kVA Model - mPDU, 40A, High (WW)	252663-B21
	8.3kVA Model - mPDU, 40A, High (power cord attached) (NA/JPN)	252663-D73
	9.2kVA Model - mPDU, 40A, High (power cord attached) (INTL)	252663-B32
	8.3kVA Model - mPDU 40A, High (core only) (NA/JPN)	252663-D75
	9.2kVA Model - mPDU 40 A, High (core only) (Int'l)	252663-B34
	8.3kVA Model - mPDU 32A, High (core only) (Int'l)	252663-B33
	4.9kVA Model - mPDU 24A, High (core only) (NA/JPN)	252663-D74
	<b>NOTE:</b> Please see the following Modular Power Distribution Unit (Zero-U/1U Modular PDUs) QuickSpecs for additional options including shorter jumper cables and country specific power cords: <a href="http://h18000.www1.hp.com/products/quickspecs/11041_div/11041_div.HTML">http://h18000.www1.hp.com/products/quickspecs/11041_div/11041_div.HTML</a> (Worldwide)	

<b>USB Options</b>	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	USB 1.44-MB External Diskette Drive (Carbonite)	DC141B
	HP USB 04 Standard Keyboard	DT528A#ABA

<b>Rack Kits</b>	1U Cable Management Arm	365403-B21
	<b>NOTE:</b> Package contains two cable management arms	



## Options

<b>HP Rack 5000 Series</b> (Graphite Metallic)	<p>HP 5642 Rack Unassembled</p> <p><b>NOTE:</b> Please see the HP Rack 5642 QuickSpecs for additional part numbers and Technical Specifications such as height, width, depth, weight, and color:  <a href="http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.HTML</a>                      (Worldwide)</p> <p><b>NOTE:</b> For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a>.</p>	358254-B21
<b>HP Rack 10000 G2 Series</b> (Carbon/Graphite Metallic)	<p>10642 G2 (42U) Rack Cabinet - Pallet AF001A</p> <p>10642 G2 (42U) Rack Cabinet - Shock Pallet AF002A</p> <p>10642 G2 (42U) Rack Cabinet - Crated AF003A</p> <p>10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet AF004A</p> <p>10636 G2 (36U) Rack Cabinet - Pallet AF011A</p> <p>10636 G2 (36U) Rack Cabinet - Shock Pallet AF012A</p> <p>10636 G2 (36U) Rack Cabinet - Crated AF013A</p> <p>10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet AF014A</p> <p>10622 G2 (22U) Rack Cabinet - Pallet AF021A</p> <p>10622 G2 (22U) Rack Cabinet - Shock Pallet AF022A</p> <p>10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet AF041A</p> <p>10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet AF042A</p> <p>10647 G2 (47U) Rack Cabinet - Pallet AF031A</p> <p><b>NOTE:</b> It is mandatory to use a shock pallet when shipping racks with equipment installed.</p> <p><b>NOTE:</b> Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:  <a href="http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.HTML">http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.HTML</a>                      (Worldwide)</p> <p><b>NOTE:</b> For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a>.</p>	
<b>HP Rack 10000 Series</b> (Graphite Metallic)	<p>HP Rack S10614 (14U) Rack Cabinet – Shock Pallet</p> <p><b>NOTE:</b> xxxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).</p> <p><b>NOTE:</b> It is mandatory to use a shock pallet in order to ship racks with equipment installed. Not all HP equipment is qualified to be shipped in the Rack 10000 series</p> <p><b>NOTE:</b> Please see the Rack 10000 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:  <a href="http://h18000.www1.hp.com/products/quickspecs/10995_div/10995_div.HTML">http://h18000.www1.hp.com/products/quickspecs/10995_div/10995_div.HTML</a>                      (Worldwide)</p> <p><b>NOTE:</b> For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a></p>	292302-B22

## Options

### Keyboards and Monitors

TFT7210R Rack Mounted 17" Monitor	348373-B21
TFT7600 Rackmount Keyboard Monitor US	AG052A
TFT7600 Rackmount Keyboard Monitor UK	AG053A
TFT7600 Rackmount Keyboard Monitor GR	AG054A
TFT7600 Rackmount Keyboard Monitor FR	AG055A
TFT7600 Rackmount Keyboard Monitor IT	AG056A
TFT7600 Rackmount Keyboard Monitor SP	AG057A
TFT7600 Rackmount Keyboard Monitor DEN	AG058A
TFT7600 Rackmount Keyboard Monitor NOR	AG059A
TFT7600 Rackmount Keyboard Monitor SE/FI	AG060A
TFT7600 Rackmount Keyboard Monitor SWI	AG061A
TFT7600 Rackmount Keyboard Monitor PORT	AG062A
TFT7600 Rackmount Keyboard Monitor BEL	AG063A
TFT7600 Rackmount Keyboard Monitor JPN2	AG064A
TFT7600 Rackmount Keyboard Monitor RUS	AG065A
TFT7600 Rackmount Keyboard Monitor INTL	AG066A
1U Rackmount Keyboard with USB, US	AG072A
1U Rackmount Keyboard with USB, UK	AG073A
1U Rackmount Keyboard with USB, GR	AG074A
1U Rackmount Keyboard with USB, FR	AG075A
1U Rackmount Keyboard with USB, ITL	AG076A
1U Rackmount Keyboard with USB, SP	AG077A
1U Rackmount Keyboard with USB, DEN	AG078A
1U Rackmount Keyboard with USB, NOR	AG079A
1U Rackmount Keyboard with USB, SE/FI	AG080A
1U Rackmount Keyboard with USB, SWI	AG081A
1U Rackmount Keyboard with USB, PORT	AG082A
1U Rackmount Keyboard with USB, BEL	AG083A
1U Rackmount Keyboard with USB, JPN2	AG084A
1U Rackmount Keyboard with USB, RUS	AG085A
1U Rackmount Keyboard with USB, INTL	AG086A

**NOTE:** For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

## Options

<b>HP KVM Switch Options</b>	2x1x16 IP Console Switch with Virtual Media	AF601A
	4x1x16 IP Console Switch with Virtual Media	AF602A
	2x16 Server Console Switch with Virtual Media	AF600A
	PS/2 Virtual Media Interface Adapter, 1 pack	AF604A
	<b>NOTE:</b> Requires PS/2 and one USB port on server.	
	Server Console Switch (KVM), 0 x 1 x 8 port	336044-B21
	Server Console Switch (KVM), 0 x 2 x 16 port	336045-B21
	PS/2 Interface Adapter, 1 pack	262588-B21
	PS/2 Interface Adapter, 8 pack	262587-B21
	USB Interface Adapter, 1 pack	336047-B21
	Serial Interface adapter - 1 Pack with power supply	373035-B21
	<b>NOTE:</b> Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	
	HP 1x4 Console Switch (ALL)	AF611A
	PS2 Server Console Cable, 6 ft, 2 pack	AF612A
	USB Server Console Cable, 6 ft, 2 pack	AF613A
<b>NOTE:</b> For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .		

<b>HP Serial Console Server Options</b>	HP 16 Port Serial Console Server (worldwide)	AF101A
	HP 48 Port Serial Console Server (worldwide)	AF102A
	Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
	Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A
<b>NOTE:</b> Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .		
<b>NOTE:</b> For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .		

## Options

### Service and Support Offerings (HP Care Pack Services)

#### **Hardware Services 4-Hour On-site Service**

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic U4496E

4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic U4497E

#### **Hardware Services 6-Hour Call to Repair On-site Service**

6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic U4498E

#### **Hardware Services Next Business Day On-Site Service**

Hardware Installation, Electronic U4506E

Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays, Electronic U4507E

#### **Support Plus**

Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic U4508E

#### **Support Plus 24**

Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic U4509E

Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic U6310E

Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic U8332E

**NOTE:** For more information, customer/resellers can contact <http://www.hp.com/services/carepack>.

Memory

**NOTE:** Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant DL365 Entry and Base Models

Standard Memory

1 GB PC2-5300 DDR2 DIMMs (667 MHz) installed (2 x 512 MB)

Upgrading Memory and Memory Interleaving

DIMMs must be installed in identical pairs. Bank interleaving is automatically enabled on a processor node under the following conditions:

- 1) Four single ranked DIMMs populated per node (4x512 MB or 4x1 GB for example) yields 2-way bank interleaving.
- 2) Two dual ranked DIMMs populated per node (2x2 GB or 2x4 GB for example) yields 2-way bank interleaving.
- 3) Four dual ranked DIMMs populated per node (4x2 GB or 4x4 GB for example) yields 4-way bank interleaving.

If single and dual ranked DIMMs are mixed on the same node, bank interleaving will not be enabled. Node interleaving can be configured via RBSU if both processors have the same memory footprint and is independent of bank interleaving.

Standard Memory Plus Optional Memory

Up to 13 GB memory is available with the standard memory of 1 GB and the optional installation of PC2-5300 DDR2 DIMMs (667 MHz) memory kits. - 6 slots would be available, and potentially could be filled with 4GB DIMM's - total of 25GB is available using the standard config

Standard Memory Replaced with Optional Memory

Up to 32 GB of memory is available with the removal of the standard 512 MB of memory and the optional installation of PC2-5300 DDR2 DIMMs (667 MHz) memory kits.

**NOTE:** DIMM banks are active only when the corresponding processor socket is populated.

**NOTE:** Chart does not represent all possible configurations.

Memory		Slot							
		1	2	3	4	5	6	7	8
Standard	1 GB	512 MB	512 MB	Empty	Empty	Empty	Empty	Empty	Empty
Optional	25 GB	512 MB	512 MB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB
Maximum	32 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB

Following are memory options available from HP:

1 GB PC2-5300 DDR2 2 x 512 MB Kit	408850-B21
2 GB PC2-5300 DDR2 2 x 1 GB Kit	408851-B21
4 GB PC2-5300 DDR2 2 x 2 GB Kit	408853-B21
8 GB PC2-5300 DDR2 2 x 4 GB Kit	408854-B21

Memory

HP ProLiant DL365 Performance Models

Standard Memory

2 GB PC2-5300 DDR2 DIMMs (667 MHz) installed (4 x 512 MB)

Upgrading Memory and Memory Interleaving

DIMMs must be installed in identical pairs. Bank interleaving is automatically enabled on a processor node under the following conditions:

- 4) Four single ranked DIMMs populated per node (4x512 MB or 4x1 GB for example) yields 2-way bank interleaving.
- 5) Two dual ranked DIMMs populated per node (2x2 GB or 2x4 GB for example) yields 2-way bank interleaving.
- 6) Four dual ranked DIMMs populated per node (4x2 GB or 4x4 GB for example) yields 4-way bank interleaving.

If single and dual ranked DIMMs are mixed on the same node, bank interleaving will not be enabled. Node interleaving can be configured via RBSU if both processors have the same memory footprint and is independent of bank interleaving.

Standard Memory Plus Optional Memory

Up to 18 GB memory is available with the standard memory of 2 GB and the optional installation PC2-5300 DDR2 DIMMs (667 MHz) memory kits. -6 slots available (4\*6 = 24). Total of 26 GB of memory available

Standard Memory Replaced with Optional Memory

Up to 32 GB of memory is available with the removal of the standard 1 GB of memory and the optional installation of PC2-5300 DDR2 DIMMs (667 MHz) memory kits.


NOTE: Chart does not represent all possible configurations.

Memory		Slot							
		1	2	3	4	5	6	7	8
Standard	2 GB	512 MB	512 MB	512 MB	512 MB	Empty	Empty	Empty	Empty
Optional	18 GB	512 MB	512 MB	512 MB	512 MB	4 GB	4 GB	4 GB	4 GB
Maximum	32 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB

Following are memory options available from HP:

1 GB PC2-5300 DDR2 2 x 512 MB Kit	408850-B21
2 GB PC2-5300 DDR2 2 x 1 GB Kit	408851-B21
4 GB PC2-5300 DDR2 2 x 2 GB Kit	408853-B21
8 GB PC2-5300 DDR2 2 x 4 GB Kit	408854-B21

Storage

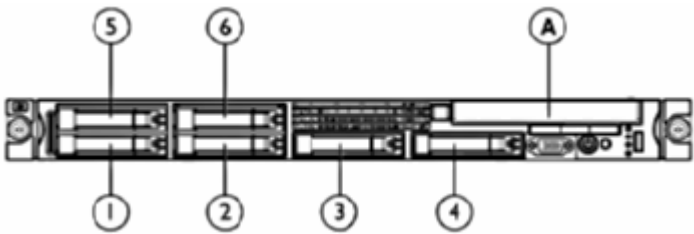

- 1-6      6 x SFF Hot Pluggable Hard Drive Bays
- A      Slimline Bay: Optional optical drive

Drive Support

Removable Media

	Quantity Supported	Position Supported	Controller
Slimline DVD-Rom Drive (8x/24x) Option Kit (Servers)	Up to 1	A	
Slimline DVD/CD-RW Combo Option Kit	Up to 1	A	Integrated IDE
Slimline DVD-RW Drive (8X) Option Kit	Up to 1	A	

Hard Drives

SAS Hard Drive

	Quantity Supported	Position Supported	Controller
146GB 3G SAS 10K SP	6	1-6	HP Smart Array E200i/64MB Controller
72GB 3G SAS 10K SP			HP Smart Array P400i/256MB Controller
72GB 3G SAS 15K SP			HP Smart Array P400/512MB BBWC Controller
36GB 3G SAS 10K SP			HP Smart Array P600/256 BBWC Controller
36GB 3G SAS 15K SP			HP Smart Array P800/512 BBWC Controller
Please see <b>NOTES</b> below regarding hard drive quantity supported by Smart Array Controller.			

- NOTE:** The Smart Array E200i Controller can support a maximum of 4 hard drives.
- NOTE:** The Smart Array P400i Controller can support a maximum of 6 hard drives. To support drives 5 and 6, the optional HP Mini SAS 4i 13.4 inch/0.35 m cable is required (PN 399546-B21).
- NOTE:** The Smart Array P600 Controller requires HP SAS 4i to Mini SAS 4i 31 inch/.79 meter cable (PN 411100-B21).



## Storage

### Serial-ATA (SATA) Hard Drive

	Quantity Supported	Position Supported	Controller
120GB 1.5G SATA 5.4K	6	1-6	HP Smart Array E200i/64MB Controller
60GB 1.5G SATA 5.4K			HP Smart Array P400i/256MB Controller
			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller
Please see <b>NOTES</b> below regarding hard drive quantity supported by Smart Array Controller.			

**NOTE:** The Smart Array E200i Controller can support a maximum of 4 hard drives.

**NOTE:** The Smart Array P400i Controller can support a maximum of 6 hard drives. To support drives 5 and 6, the optional HP Mini SAS 4i 13.4 inch/0.35 m cable is required (PN 399546-B21).

**NOTE:** The Smart Array P600 Controller requires HP SAS 4i to Mini SAS 4i 31 inch/.79 meter cable (PN 411100-B21).

### External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
Modular Smart Array 20 Family	Please see the QuickSpecs to determine configuration requirements	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller
Modular Smart Array 30 Family	Please see the QuickSpecs to determine configuration requirements.	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller
Modular Smart Array 50 Enclosure	2	External	HP Smart Array P600/256 BBWC Controller
Modular Smart Array 500 G2 System	1	External	Smart Array 642 Controller (used as Host Bus Adapter) Please see the Modular Smart Array 500 G2 QuickSpecs for the latest list of supported HBAs: <a href="http://www.hp.com/go/msa500">http://www.hp.com/go/msa500</a>
Modular Smart Array 1000	Please see the QuickSpecs to determine configuration requirements	External	MSA1000: <a href="http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML">http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML</a>
Modular Smart Array 1500 cs			MSA1500 cs: <a href="http://h18000.www1.hp.com/products/quickspecs/11945_div/11945_div.HTML">http://h18000.www1.hp.com/products/quickspecs/11945_div/11945_div.HTML</a>

### Tape Drives, Tape Autoloaders, Tape Libraries & D2D Backup

**NOTE:** For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/Division/10233.html> (Worldwide)

**NOTE:** For an up-to-date listing of the latest O/S Support details for each of the Tape Autoloaders and Tape Libraries listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/Division/10809.html> (Worldwide)



## Storage

**NOTE:** For complete listing of tape drive offerings see  
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

**NOTE:** SAS Tape Drives: Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

	Position Supported	Controller	Controller Part Number
<b>HP StorageWorks SCSI Tape Drives, External</b> Ultrium 232 Ultrium 448 Ultrium 460 Ultrium 960 Ultrium 920 DAT 40 DAT 72 DLT VS160 SDLT 600 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP SC11Xe Host Bus Adapter	412911-B21
<b>HP StorageWorks USB Tape Drives, External</b> DAT 40 USB DAT 72 USB 1U Rack-Mount Kit	External	USB 2.0 Port	N/A
<b>HP StorageWorks SAS Tape Drives, External</b> Ultrium 448 SAS Ultrium 920 SAS 1U Rack-Mount Kit	External	HP SC44Ge Host Bus Adapter Smart Array E500/256MB Controller <b>NOTE: The following SAS Smart Array controllers require ROM Flash version 2.04 or higher for SAS tape support:</b> HP Smart Array P400/256MB Controller HP Smart Array P400/512MB Controller <b>NOTE: Please visit <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a> for details about minimum SAS controller firmware version and SAS cabling requirements.</b>	416096-B21 435129-B21 405132-B21 411064-B21
<b>HP StorageWorks SCSI Tape Automation, External</b> DAT 72x10 Autoloader	External	HP SC11Xe Host Bus Adapter	412911-B21

Storage

1/8 Tape Autoloader MSL2024 MSL4048 MSL8096 MSL6000		HP U320e SCSI Host Bus Adapter <b>NOTE:</b> Only valid for MSL tape libraries.	AH627A
<b>HP StorageWorks SAS Tape Automation, External</b> 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096	External	HP SC44Ge Host Bus Adapter  Smart Array E500/256MB Controller  <b>NOTE:</b> Please visit <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a> for details about minimum SAS controller firmware version and SAS cabling requirements.	416096-B21  435129-B21
<b>HP StorageWorks Fibre Tape Automation, External</b> MSL2024 MSL4048 MSL6000	External	Please consult the EBS connectivity matrix at <a href="http://www.hp.com/go/ebs">http://www.hp.com/go/ebs</a> for detailed connectivity information.	N/A
<b>HP StorageWorks D2D Backup Systems</b> D2D110 D2D120	External	Embedded Network Controller	N/A

## *Power Specifications*

To review typical system power ratings use the Active Answers Power Calculator which is available via the online tool located at URL: <http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls>

To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: DL365
- Click on: "Power Calculator" link. (You may need to scroll down to see it)

### Technical Specifications

<b>System Unit</b>	<b>Dimensions (H x W x D)</b> 1.70 x 16.78 x 27.75 in (4.32 x 42.62 x 70.49 cm)	
<b>Weight</b>	Maximum (six hard drives installed, two power supply, two processor)	37 lb (16.78 kg)
	No hard drives installed, one power supply, one processor	27.5 lb (12.47 kg)
<b>Input Requirements</b>	Rated Input Voltage	100 to 240 VAC
	Rated Input Current	7.1 Amps (at 120VAC) to 3.5 Amps (240 at VAC)
	Rated Input Frequency	50 to 60 Hz
	Rated Input Power	852 W
<b>BTU Rating</b>	2910 BTU/HR (at 120 VAC); 2870 (at 240 VAC) <b>NOTE:</b> The BTU rating listed is for the Rated Input Power of 585 W.	
<b>Power Specifications</b>	To review typical system power ratings use the Power Calculator which is available via the online tool located at URL: <a href="http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls">http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls</a>  To drill down to calculators: - Click on: "ProLiant Servers" - Click on the Server of interest. Example: DL365 - Click on: "Power Calculator" link. (You may need to scroll down to see it)	
<b>Power Supply Output Power</b> (per power supply)	Rated Steady-State Power	700 W
<b>System Inlet Temperature</b>	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).
	Storage	-30° to 60°C - Maximum rate of change is 20°C/Hr.
<b>Humidity</b> (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C maximum wet bulb temperature
	Storage	5 to 95% relative humidity (Rh), 38.7°C maximum wet bulb temperature.
<b>Acoustic Noise</b>	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment.	

Technical Specifications

Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).

Idle:

L<sub>WAd</sub> (BELS) 6.4

L<sub>pAm</sub> (dBA) 49

Operating:

L<sub>WAd</sub> (BELS) 6.4 BELS

L<sub>pAm</sub> (dBA) 49 dBA

Smart Array E200i Controller	Disk Drive and Enclosure Interface	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)
	SAS Connectors	2 internal (SFF8484) x4 wide port connectors
	Cache Memory Speed	DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth.
	Server Interface	x4 2.5G PCIe provides 2GB/s maximum bandwidth.
	SAS Speed	x8 3G SAS provides 2.4GB/s maximum bandwidth.
	Cache Memory	40-bit 64MB or 128MB cache: ECC protection, battery-backed, and transportable
	Logical Volumes Supported	Up to 32 logical volumes
	Maximum Volume Capacity	3TB (6 x 500GB)
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space
	RAID Support	RAID 5 (Distributed Data Guarding) requires 128MB BBWC option
		RAID 1+0 (Striping & Mirroring)
		RAID 0 (Striping)
	Upgradeable Firmware	Upgradeable Firmware

## Technical Specifications

<b>Smart Array P400i Controller</b>	<b>Disk Drive and Enclosure Interface</b>	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)
	<b>SAS Connectors</b>	2 internal (SFF8484) x4 wide port connectors
	<b>Cache Memory Speed</b>	DDR2-533MHz with 40 or 72-bit wide bus provides up to 4.2 GB/s maximum bandwidth.
	<b>Server Interface</b>	x8 2.5G PCIe provides 2GB/s maximum bandwidth.
	<b>SAS Speed</b>	x8 3G SAS provides 2.4GB/s maximum bandwidth.
	<b>Cache Memory</b>	40-bit 256MB cache (72-bit 512MB module upgrades available); ECC protection, battery-backed, and transportable
	<b>Logical Drives Supported</b>	Up to 32 logical drives
	<b>Maximum Logical Drive Capacity</b>	3 TB (6 x 500GB)
	<b>Host Memory Addressing</b>	64-bit, supporting greater than 4GB server memory space
	<b>RAID Support</b>	RAID 6 with ADG (Advanced Data Guarding) requires Battery Backed Write Cache Upgrade RAID 5 (Distributed Data Guarding) RAID 1+0 (Striping & Mirroring) RAID 0 (Striping)
	<b>Upgradeable Firmware</b>	Upgradeable Firmware with recovery ROM feature

<b>Two Embedded NC373i Multifunction Gigabit Server Adapters</b>	<b>Network Interface</b>	10/100/1000-T
	<b>Compatibility</b>	EEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX
	<b>Data Transfer Method</b>	PCI Express, four lanes (x4)
	<b>Network Transfer Rate</b>	10Base-T (Half-Duplex) 10 Mb/s
		10Base-T (Full-Duplex) 20 Mb/s
		100Base-TX (Half-Duplex) 100 Mb/s
		100Base-TX (Full-Duplex) 200 Mb/s
		1000Base-TX (Half and Full-Duplex) 2000 Mb/s
	<b>Connector</b>	RJ-45
	<b>Cable Support</b>	10Base-T Categories 3, 4 or 5 UTP up to 328 ft (100 m)
		10/100/1000 Base-TX Category 5 UTP up to 328 ft (100 m)



## *Technical Specifications*

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.