


### Overview

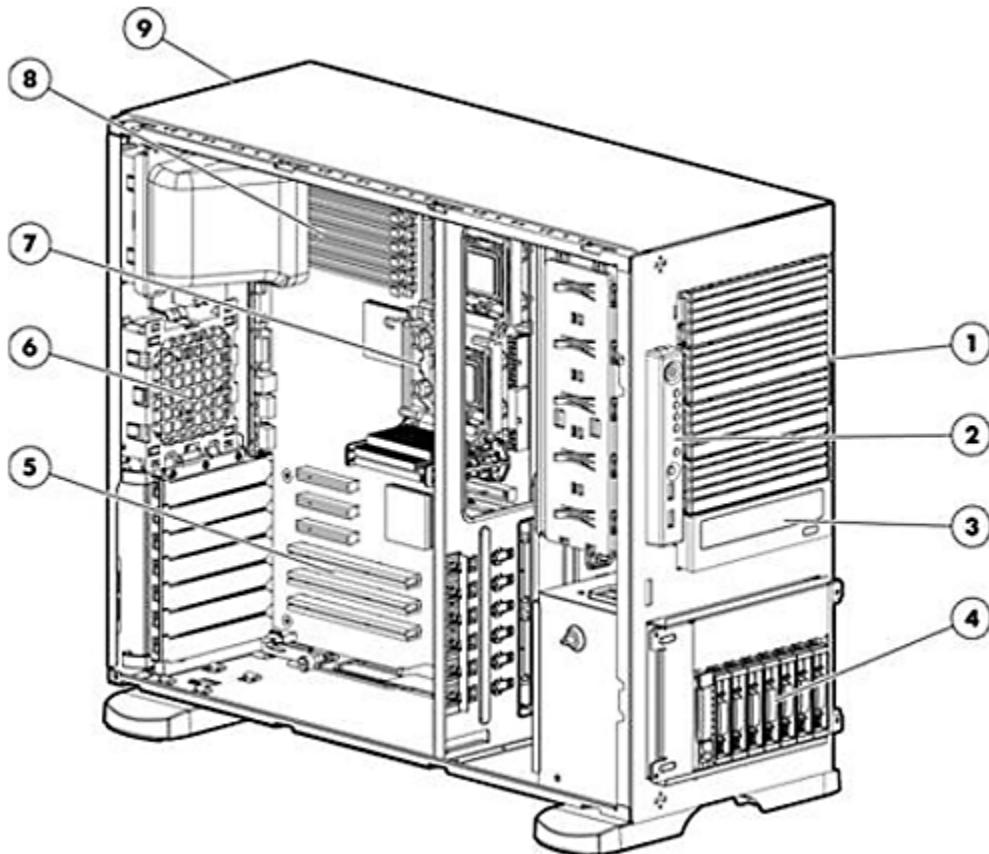

- 1. Five removable media bays
- 2. Front display panel; includes power button, UID, two USB 2.0 ports, and system status LED's
- 3. 48X Max IDE CD-ROM Drive (on standard models)
- 4. Eight SFF (2.5") (shown) or six LFF (3.5") SAS or SATA Hot Plug drive bays
- 5. Six expansion slots (three PCI Express, three PCI-X)
- 6. Two system fans standard with support for optional redundant system fans
- 7. Support for two Intel Dual-Core and Quad-Core Xeon 5000 sequence processors
- 8. Eight PC2-5300 FB-DIMM (DDR2 667) memory sockets
- 9. Single Hot-Plug power supply standard, optional second redundant supply for availability

### What's New

- Intel's new Quad-Core Xeon 5300 series processors with 8MB (2x4MB) L2 cache
- Enhanced memory support on Quad-Core models for a maximum of 32 GB of FB-DIMM memory
- PCI-X expander cage option kit provides 2 additional full length 64-bit PCI-X slots from a single PCI Express slot
- Support for the expanded portfolio of Hot Plug 2.5" (SFF) and 3.5" (LFF) SAS and SATA hard disks.

### Overview

### At A Glance

Building on a tradition of excellence, the HP ProLiant family introduces the fifth generation HP ProLiant ML350 server. The HP ProLiant ML350 G5 server provides Multi-Core performance, enterprise level management, and highly available redundant options in a modular server form factor. New for this generation is a smaller and quieter chassis, embedded Smart Array E200i Controller and 5 media bays.

- **Processors:**

- Dual-Core and Quad-Core Intel® Xeon™ 5000 sequence processors with up to 8 MB Level 2 cache for blazing performance; systems support up to 2 processors
- 1333/1066/667 MHz front side bus (FSB)
- Intel® 5000Z chipset

- **Memory:**

- Eight PC2-5300 FB-DIMMs (DDR2 667) sockets with Online-Spare support for cost-effective memory configuration and expansion
- Up to 16 GB of memory, supported by (8) slots of PC2-5300 Fully Buffered DIMMs (DDR2-667); 4:1 interleaving; and online spare
- Up to 32 GB of memory supported on Quad-Core (5300 series) models

- **Storage Controllers:**

- Entry Models: HP Smart Array E200i/64MB Controller (integrated SAS/SATA Hot-Plug Controller with RAID 0/1/1+0 support)
- Base Models: HP Smart Array E200i/128 BBWC Controller (RAID 0/1/1+0/5)
- 128MB BBWC optional upgrade kit for RAID 5 support also available

- **Internal Drive Support:**

- Up to eight SFF (2.5") or six LFF (3.5") Hot Plug Serial Attached SCSI (SAS) or Serial-ATA (SATA) hard drives
- Maximum of 4.50TB of internal storage capacity (using Hot-Plug SATA drives)

- **Network Controller:**

- Embedded NC373i Multifunction Gigabit Server Adapter with TCP/IP Offload Engine

- **Expansion Slots:**

- Six total expansion slots
- One 64-bit/133-MHz PCI-X; two 64-bit/100-MHz PCI-X; three x8 PCI Express (x4 speed)
- Optional PCI-X Expander provides additional two 64-bit PCI-X slots by converting a single PCI Express slot

- **USB Ports:**

- Six USB 2.0 ports: (2) front; (2) rear; (2) internal

- **Redundancy:**

- Optional Hot plug redundant power supplies
- Support for optional redundant system fans

- **Management:**

- Integrated Lights-Out 2 (iLO 2) standard for remote management
- Support for ROM-Based Setup Utility (RBSU) and redundant ROM
- Systems Insight Manager, SmartStart, and Automatic Server Recovery 2 (ASR-2)
- HP Power Meter and Power Regulator for ProLiant, delivering integrated power consumption monitoring and server level, policy based power management for industry leading energy efficiency and savings on system power and cooling costs

- **Deployment/Serviceability:**

- Optional parallel and second serial port available without using a PCI slot
- Tool-free chassis entry and component access
- Tool-free motherboard removal
- Universal rail solution supporting both square and round hole rack environments

- **Warranty:**

- Protected by HP Services and a worldwide network of resellers and service providers. Three-year Next Business Day, on-site limited global warranty. Certain restrictions and exclusions apply. Pre-Failure Notification on processors, memory, and SAS hard drives. SATA hard drives have a one-year warranty.

### Standard Features

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

<b>Processor</b> One of the following depending on Model	Quad-Core Intel Xeon Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB) Quad-Core Intel Xeon Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB) Dual-Core Intel Xeon Processor 5160 (3.00 GHz, 80 Watts, 1333 FSB) Dual-Core Intel Xeon Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB) Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB) Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 65 Watts, 1333 FSB) Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB) Dual-Core Intel Xeon Processor 5110 (1.60 GHz, 65 Watts, 1066 FSB) Dual-Core Intel Xeon Processor 5080 (3.73 GHz, 85 Watts, 1066 FSB) Dual-Core Intel Xeon Processor 5060 (3.20 GHz, 85 Watts, 1066 FSB) Dual-Core Intel Xeon Processor 5050 (3.00 GHz, 85 Watts, 667 FSB)
---	---

<b>Cache Memory</b> One of the following depending on Model	4MB (2 x 2MB) Level 2 cache (5000 series) 4MB (1 x 4MB) Level 2 cache (5100 series) 8MB (2 x 4MB) Level 2 cache (5300 series)
--	---

<b>Upgradeability</b>	Upgradeable to dual processing (8 or 4 cores)
-----------------------	---

<b>Chipset</b>	Intel 5000Z Chipset <b>NOTE:</b> For more information regarding Intel chipsets, please see the following URL: <a href="http://www.intel.com/products/server/chipsets/">http://www.intel.com/products/server/chipsets/</a> .
----------------	---

<b>Memory Protection</b>	Online spare Advanced ECC
--------------------------	------------------------------

<b>Memory</b> One of the following depending on model	Type PC2-5300 Fully Buffered DIMMs (DDR2-667) Standard (Entry Models) 512 MB (1 x 512 MB) Standard (Base Models) 1 GB (2 x 512 MB) Maximum (Dual-Core Models) 16 GB (8 x 2 GB) Maximum (Quad-Core Models) 32 GB (8 x 4 GB)
--	--

<b>Network Controller</b>	Embedded NC373i Multifunction Gigabit Server Adapter with TCP/IP Offload Engine
---------------------------	---

### Standard Features

Expansion Slots	Slot Number	Bus Speed/Connector	Maximum Card Length	Bus Number*	Device Number**	Hot Plug	PCI Voltage
	6****	PCI Express x4/x8	12.28"	15	0	no	N/A
	5	PCI Express x4/x8	12.28"	6	0	no	N/A
	4***	PCI Express x4/x8	12.28"	9	0	no	N/A
	3	64-bit/100MHz PCI-X	12.28"	12	2	no	3.3 Volt
	2	64-bit/100MHz PCI-X	12.28"	12	1	no	3.3 Volt
	1	64-bit/133MHz PCI-X	12.28"	20	1	no	3.3 Volt

\*NOTE: Bus number listed reflects the default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

\*\*NOTE: Slots are enumerated differently based on operating system. Microsoft's operating systems enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

\*\*\*NOTE: A single PCI Express slot with x8 Bus Speed can be achieved by attaching the x4/x8 PCIE Bus Expander option kit (403724-B21) to slot number 4.

\*\*\*\*NOTE: The optional PCI-X expander can utilize slot 6 to provide an additional two (2) 64-Bit PCI-X full length, full height slots. Please see "Server Specific Options" below for more information. (435670-B21)

NOTE: Slots 1-3 can accept 3.3V or universal keyed PCI cards.

<b>Storage Controller</b>	Entry Models	HP Smart Array E200i/64MB Controller
	Base Models	HP Smart Array E200i/128 BBWC Controller
<b>NOTE:</b> Supports RAID 0/1/1+0 with 64MB of Cache, upgradeable to 128MB with BBWC for RAID 5 support.		

<b>Storage</b>	Diskette Drives	None included standard
	Optical Drive	48x IDE CD-ROM drive
	Hard Drives	None included standard

<b>Maximum Internal Storage</b>	Hot Plug LFF (3.5") Serial ATA (SATA)	4.50TB	6 x 750GB
	Hot Plug LFF (3.5") Serial Attached SCSI (SAS)	1.80TB	6 x 300GB
	Hot Plug SFF (2.5") SATA	480GB	8 x 60GB
	Hot Plug SFF (2.5") SAS	1.168TB	8 x 146GB

### Standard Features

<b>Interfaces</b>	Parallel	Optional parallel port available
	Serial	1 (optional 2nd serial port available)
	Pointing Device (Mouse)	1
	Graphics	1
	Keyboard	1
	Network RJ-45	2 (1 dedicated for iLO 2)
	USB 2.0 Ports	6 (2 front, 2 rear, 2 internal) <b>NOTE:</b> Please see the following URL for additional information regarding USB support: <a href="http://h18004.www1.hp.com/products/servers/platforms/usb-support.html">http://h18004.www1.hp.com/products/servers/platforms/usb-support.html</a> .
<b>Graphics</b>	Integrated ATI ES1000 Video Controller with 16 MB SDRAM Video Memory	
	VGA connector; up to 1600 x 1200 resolution supported	
<b>Form Factor</b>	Tower or Rack (5U)	
		<b>NOTE:</b> Rack models (and rack conversion kit) support: <ul style="list-style-type: none"><li>• Square or round hole racks 24"- 35" deep, including HP Rack System /E and HP Systems</li><li>• Telco racks with 3rd part option kit from Rack Solutions</li></ul> <a href="http://www.racksolutions.com/hp">http://www.racksolutions.com/hp</a>
<b>ProLiant Essentials Foundation Pack Software</b>	HP Systems Insight Manager	HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other infrastructure devices across multiple operating system platforms.  Through a single management view, HP SIM provides core management services that include device discovery and identification, event views, health monitoring, inventory data collection, software version control and reporting. HP SIM is built on industry standards and is extensible with value-added ProLiant Essentials, Integrity Essentials and Storage Essentials software to meet individual management needs. For more details on HP SIM visit <a href="http://www.hp.com/go/hpsim">http://www.hp.com/go/hpsim</a> .  HP SIM provides organizations with the following benefits: <ul style="list-style-type: none"><li>• Simplifies and consolidates infrastructure lifecycle management using task and query based functionality</li><li>• Provides the foundation for infrastructure automation and virtualization</li><li>• Enables IT management based on business processes not hardware platforms</li><li>• Lowers infrastructure maintenance cost and frees resources for innovation</li><li>• Maximizes resource utilization with virtualization technologies</li><li>• Provides a central point of integration between infrastructure and Enterprise management tools such as HP OpenView</li></ul>

### Standard Features

Insight Management Agents	<p>Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers,</p> <p>Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack. For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at: <a href="http://www.hp.com/servers/manage">http://www.hp.com/servers/manage</a></p>
SmartStart	<p>SmartStart simplifies server setup by providing a quick, easy way to deploy reliable and consistent server configurations. For more information, please visit the SmartStart Web site at <a href="http://www.hp.com/servers/manage">http://www.hp.com/servers/manage</a>.</p> <p>Minimum SmartStart version supported: 7.51</p> <p>Latest SmartStart version supported: 7.51</p>
Subscriber's Choice	<p>Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides automatic delivery of software and driver change notifications for ProLiant products. Sign up at <a href="http://www.hp.com/go/subscriberschoice">http://www.hp.com/go/subscriberschoice</a> and customize your profile to receive alerts on updates as they become available.</p>
ROMPaq, support software, and configuration utilities	<p>The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options</p> <p>Available in SmartStart or downloadable from the Software and Drivers download pages at <a href="http://www.hp.com/go/support">http://www.hp.com/go/support</a>.</p>
Insight Diagnostics Online Edition	<p>The most advanced configuration analysis, reporting and troubleshooting utilities used by HP at your fingertips</p> <p>Available in SmartStart.</p>
Optional ProLiant Essentials Value Packs	<p>Optional software offerings that extend the functionality of an Adaptive Infrastructure to address specific business problems and needs:</p> <ul style="list-style-type: none"><li>• Rapid Deployment Pack (RDP) is an automated deployment and provisioning solution for all ProLiant servers. RDP includes the ProLiant Integration Module featuring ProLiant server pre-configured events for OS installation, and optimized software drivers, firmware and management agents. Every RDP disc includes a 7-day, 10-node trial license for evaluation purposes. RDP requires a license for each server deployed and is available for purchase with HP servers. For more information, visit: <a href="http://www.hp.com/servers/rdp">http://www.hp.com/servers/rdp</a>.</li><li>• Performance Management Pack - a performance management solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.</li><li>• Intelligent Networking Pack - detects and analyzes network bottlenecks or broken network linkages and steers traffic to the optimum route based on network conditions, plus it provides an</li></ul>



### Standard Features

extra layer of protection. The virus throttle feature of the solution slows the propagation of fast spreading virus

- Vulnerability and Patch Management Pack - identifies and remediates software security vulnerabilities due to missing patches as well operating system configurations that can be exploited by viruses, worms, and other blended threats
- Virtual Machine Management Pack - provides central management and control of virtual machines from Microsoft and VMware. Integrated approach provides the ability to manage both physical and virtual resources from a single management console.
- Server Migration Pack - The Server Migration Pack automates the manual processes required for migrating servers between physical or virtual platforms (P2V, V2P, and V2V).
- Accelerated iSCSI Pack - enables the embedded Multifunction network controller to serve as both a NIC and an iSCSI HBA providing access to SAN storage over the same connection used for networking. Processing of the protocol stack is offloaded to the NIC reducing CPU utilization and greatly improving the speed with which the requests are processed and sent to the network.
- Remote Directory Memory Access (RDMA) Pack for Embedded Multifunction Gigabit Server Adapters - provides direct and faster communication between application buffers in separate servers for tasks that involves moving large amounts of data, such as network backups, database read/write, and high performance computing.
- Integrated Lights-Out Advanced Pack - upgrades the iLO 2 processor with comprehensive remote control including Virtual KVM graphical console, virtual media, power management and enterprise security.
- Integrated Lights-Out Select Pack - upgrades the iLO 2 processor with virtual media, power management and enterprise security for text console environments.

### Optional Remote Management Packs

**NOTE:** Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

**NOTE:** For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>.

### Industry Standard Compliance

ACPI V2.0 Compliant  
PCI 2.2 Compliant  
PXE Support  
WOL Support  
PCI-X 1.0a Compliant  
Novell Certified  
Microsoft® Logo certifications  
USB 2.0

### Availability

Optional Hot-Plug, Redundant Power supply  
Online-Spare Memory  
Optional Dual Redundant System Fans

### Standard Features

**Remote Management** Integrated Lights Out 2 (iLO 2) Standard Management:

- Virtual Text Remote Console
- Virtual Power Button Control
- Integrated Remote Console
- Dedicated & full function shared network connectivity
- Embedded system health
- Browser, command line and scripted access
- Automatic IP Configuration via DHCP/DNS/WINS
- Industry Standard 128-bit Secure Sockets Layer (SSL) and Secure Shell security (SSH)
- OS independent hardware health status
- IML and iLO Event Logging
- Support for 12 user accounts with customizable access privilege

**System Management** HP Systems Insight Manager

SmartStart

Redundant ROM

System Firmware Update

ROMPaq

ProLiant RBSU (ROM-Based Setup Utility)

Automatic Server Recovery-2 (ASR-2)

Dynamic Sector Repairing (with Smart Array Controller)

Drive Parameter Tracking (with Smart Array Controller)

Pre-Failure Warranty (covers processors, memory, and SAS hard drives)

### Security

Power-on password

Setup password

Diskette boot control

Parallel and serial interface control

Disk configuration lock

Power switch security

### Server Power Cords

Tower models ship standard with a 6' lowline NEMA power cord.

Rack models ship standard with a 6' IEC cable. Most redundant power supply options ship with a 6' power cord. The one exception is the IEC redundant power supply (P/N 399771-B21) which ships with a 6' IEC cable only.

### UPS and PDU Power Cord Matrix

Please see the UPS and PDU cable matrix that lists cable descriptions, requirements, and specifications for UPS and PDU units:

[ftp://ftp.compaq.com/pub/products/servers/ProLiantstorage/power-protection/powercordmatrix.pdf](http://ftp.compaq.com/pub/products/servers/ProLiantstorage/power-protection/powercordmatrix.pdf).

### Power Supply

800 Watt-CE Mark Compliant Hot Plug Power Supply (1000 Watt high line)

Optional second Power Supply provides redundant capability

**NOTE:** Please see the "Power Specifications" section later in this document for low line and high line requirements.

### System Fans

2 fans ship standard, dual redundant fans are optional, 4 fans total supported (does not include power supply or processor heat sink fans)

### Standard Features

<b>Required Cabling</b>	For required cabling information, refer to the HP ProLiant ML350 G5 cabling matrix at <a href="http://www.hp.com/servers/proliantML350">http://www.hp.com/servers/proliantML350</a> . <b>NOTE:</b> Please see the "Storage" section of this QuickSpecs for important information on controllers and cables required to support SAS or SATA hard drives as well as storage management software available for SATA hard drives.
<b>OS Support</b>	Microsoft Windows Server 2003/R2 (Standard, Web, and Enterprise Editions) Microsoft Windows Small Business Server 2003 Microsoft Windows 2000 Server and Advanced Server Novell NetWare 6.5/Open Enterprise Server LINUX (Red Hat, SuSE) OpenServer 5.0.7/6.0 UnixWare 7.1.3/7.1.4 <b>NOTE:</b> For a complete and up-to-date listing of supported operating systems please visit our OS Support Matrix at: <a href="http://www.hp.com/go/supportos">http://www.hp.com/go/supportos</a> . <b>NOTE:</b> For a complete and up-to-date information on Linux support, please visit the HP Linux Web site at <a href="http://h18000.www1.hp.com/products/servers/linux/hpLinuxcert.html">http://h18000.www1.hp.com/products/servers/linux/hpLinuxcert.html</a> <b>NOTE:</b> Optional hardware may be required to support some operating systems. <b>NOTE:</b> For information on how to buy server operating systems from HP please visit the OS product site at: <a href="http://h18004.www1.hp.com/products/servers/software/OEM.html">http://h18004.www1.hp.com/products/servers/software/OEM.html</a> <b>NOTE:</b> For an up-to-date listing of the latest drivers available for the HP ProLiant ML350 G5, please see: <a href="http://www.compaq.com/support/files/server/us/index.html">http://www.compaq.com/support/files/server/us/index.html</a> . <b>NOTE:</b> For more information on VMware support, please visit the VMware Server Support Matrix at: <a href="http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html">http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html</a> .
<b>Installation of Server into Telco Racks</b>	Support for all 2-post Telco racks requires the use of the HP ProLiant ML350 G5 rack kit and an additional option kit from Rack Solutions. <a href="http://www.racksolutions.com/hp">http://www.racksolutions.com/hp</a> .
<b>Factory Express Portfolio for Servers and Storage</b>	HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.  Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.  For more information on Factory Express services for your specific server model please contact your sales representative or go to <a href="http://www.hp.com/go/factory-express">http://www.hp.com/go/factory-express</a> .
<b>HP Enterprise Configurator</b>	The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

### Standard Features

#### HP ProLiant Smart Buys

The HP Smart Buy program offers mainstream business solutions at competitive prices with excellent availability and superior HP quality. It offers a wide range of industry-leading HP products at compelling prices, allowing you to receive richer configurations with additional options.

**NOTE:** For detailed specification information on ProLiant Smart Buys please click on the following link: <ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>

#### Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

**NOTE:** Server Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

HP Care Pack services include coverage for the HP branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as 22" and smaller external monitors and tower UPS options up to 3kVA; these items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

HP services provide continuous care and support expertise with committed response designed to meet your IT and business needs.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vendor support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Enhanced Care - Minimum recommended service support offer designed to ensure customers have access to expert assistance, whenever they need it.

- *4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Continuance Care - Recommended service delivering cost-effective support options designed to extend HP Services committed response and guaranteed fix times, designed to speed problem identification and resolution.

- *6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Total Care - Highest HP Support service level recommend to help increase IT performance and availability with comprehensive, integrated hardware and software services

- *Support Plus 24 - Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays*

Deployment Services - HP Installation and Start Up services designed to take time, risk, and worry out of the deployment of ProLiant servers - and free customers IT support staff to focus on what they do best, their business.

- *Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays*



### Standard Features

**NOTE:** For a complete listing of service offerings and information visit:  
<http://www.hp.com/services/proliantservices>  
<http://www.hp.com/go/proliant/carepack>

### Models

**NOTE:** For detailed specification information on ProLiant Smart Buys please click on the following link:  
<ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>.

<b>HP ML350 G5 Entry Models</b>	<b>Processor(s)</b> One of the following depending on Model	(1) Dual-Core Intel Xeon 5130 Processor (2.0GHz, 65 Watts, 1333 FSB) (1) Dual-Core Intel Xeon 5120 Processor (1.86 GHz, 65 Watts, 1066 FSB)
<b>Tower</b>		
<b>Dual-Core Models</b>		
<b>HP ML350T05 5130 LFF</b> 416893-001	<b>Cache Memory</b>	4MB (1 x 4MB) Level 2 cache - 5100 Series
	<b>Memory</b>	512 MB (1 x 512 MB) Standard; PC2-5300 Fully Buffered DIMMs (DDR2-667)
<b>HP ML350T05 5120 LFF</b> 416892-001	<b>Network Controller</b>	Embedded NC373i Multifunction Gigabit Server Adapter with TCP/IP Offload Engine
<b>Rack</b>		
<b>Dual-Core Models</b>		
<b>HP ML350R05 5130 LFF</b> 416894-001	<b>Storage Controller</b>	Smart Array E200i/64 Controller (RAID 0/1/1+0)
	<b>Hard Drive</b>	None Ship Standard; (0/6 LFF)
	<b>Internal Storage</b>	1.80TB LFF SAS; 4.50TB LFF SATA
	<b>Optical Drive</b>	48x CD-ROM
	<b>PCI-Express Slots</b>	Six expansion slots (three PCI Express, three PCI-X)
	<b>Power Supplies</b>	800-Watt CE-mark compliant Hot-Plug power supply Optional second power supply provides redundant operation
	<b>Fans</b>	2 fans ship standard, 4 fans total supported (does not include power supply or processor heatsink fans)
	<b>Form Factor</b>	Tower
	One of the following depending on Model	Rack (5U), (8.75 in/22.25 cm)

<b>HP ML350 G5 Base Models</b>	<b>Processor(s)</b> One of the following depending on Model	(1) Quad-Core Intel Xeon E5320 Processor (1.86 GHz, 80 Watts, 1066 FSB) (1) Quad-Core Intel Xeon E5310 Processor (1.6 GHz, 80 Watts, 1066 FSB) (1) Dual-Core Intel Xeon 5140 Processor (2.33 GHz, 65 Watts, 1333 FSB) (1) Dual-Core Intel Xeon 5130 Processor (2.0 GHz, 65 Watts, 1333 FSB) (1) Dual-Core Intel Xeon 5060 Processor (3.2 GHz, 95 Watts, 1066 FSB)
<b>Tower</b>		
<b>Quad-Core Models</b>		
<b>HP ML350T05 E5320 SFF</b> 438730-001	<b>Cache Memory</b>	8MB (2 x 4MB) Level 2 cache - 5300 Series
	<b>Memory</b>	4MB (1 x 4MB) Level 2 cache - 5100 Series 4MB (2 x 2MB) Level 2 cache - 5000 Series
<b>HP ML350T05 E5310 SFF</b> 434717-001	<b>Network Controller</b>	1 GB (2 x 512 MB) Standard; PC2-5300 Fully Buffered DIMMs (DDR2-667)
<b>Dual-Core Models</b>		
<b>HP ML350T05 5140 SFF</b> 417605-001	<b>Storage Controller</b>	Embedded NC373i Multifunction Gigabit Server Adapter with TCP/IP Offload Engine
	<b>Hard Drive</b>	Smart Array E200i/128 BBWC Controller (RAID 0/1/1+0/5)
	<b>Internal Storage</b>	None Ship Standard; (0/8 SFF)
	<b>Optical Drive</b>	1.168TB SFF SAS; 480GB SFF SATA
	<b>PCI-Express Slots</b>	16x CD-ROM - Dual Core Models 16x DVD-ROM - Quad Core Models
	<b>Power Supplies</b>	Six expansion slots (three PCI Express, three PCI-X) 800-Watt CE-mark compliant Hot-Plug power supply Optional second power supply provides redundant operation
<b>Rack</b>		
<b>Dual-Core Models</b>		
<b>HP ML350R05 5140 SFF</b> 417538-001	<b>Storage Controller</b>	Smart Array E200i/64 Controller (RAID 0/1/1+0)
	<b>Hard Drive</b>	None Ship Standard; (0/6 LFF)
	<b>Internal Storage</b>	1.80TB LFF SAS; 4.50TB LFF SATA
	<b>Optical Drive</b>	48x CD-ROM
	<b>PCI-Express Slots</b>	Six expansion slots (three PCI Express, three PCI-X)
	<b>Power Supplies</b>	800-Watt CE-mark compliant Hot-Plug power supply Optional second power supply provides redundant operation

### Models

#### HP ML350R05 5130

SFF

417537-001

#### HP ML350R05 5060

SFF

409393-001

#### Fans

2 fans ship standard, 4 fans total supported (does not include power supply or processor heatsink fans)

#### Form Factor

One of the following  
depending on Model

Tower

Rack (5U), (8.75 in/22.25 cm)

### Configuration Information - Factory Integrated Models

**NOTE:** All configure-to-order servers must start with a CTO Chassis. Use the following section to order a server customized to your requirements with options integrated at the factory. The options you select in steps 2 and 3 will be integrated with the base configuration you select in step 1. Additional options selected in Step 4 will also be integrated when applicable.

**NOTE:** Standard models of this product offering (see previous section of this document) do not support HP Factory Express Server Configuration Level 1.

### Step 1: Base Configuration (choose one of the following configurable models)

#### Models

##### ML350 G5 Tower Models

###### LFF - 3.5" Drives

HP ProLiant ML350G5 LFF SAS/SATA Tower CTO Chassis

412645-B21

###### Includes:

Embedded NC373i Multifunction Gigabit Server Adapter with TCP/IP Offload Engine

Integrated Smart Array E200i Controller

Six Hot-Plug (LFF) SAS/SATA Drive Bays

Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)

Six USB ports

800W Hot-Plug Power Supply

Tower Form Factor

Keyboard

2-button Mouse

###### SFF - 2.5" Drives

HP ProLiant ML350G5 SFF SAS/SATA Tower CTO Chassis

395570-B21

###### Includes:

Embedded NC373i Multifunction Gigabit Server Adapter with TCP/IP Offload Engine

Integrated Smart Array E200i Controller

Eight Hot-Plug (SFF) SAS/SATA Drive Bays

Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)

Six USB ports

800W Hot-Plug Power Supply

Tower Form Factor

Keyboard

2-button Mouse

##### ML350 G5 Rack Models

###### LFF - 3.5" Drives

HP ProLiant ML350G5 LFF SAS/SATA Rack CTO Chassis

412644-B21

###### Includes:

Embedded NC373i Multifunction Gigabit Server Adapter with TCP/IP Offload Engine

Integrated Smart Array E200i Controller

Six Hot-Plug (LFF) SAS/SATA Drive Bays

Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)



### Configuration Information - Factory Integrated Models

Six USB ports  
800W Hot-Plug Power Supply  
Rack (5U) Form Factor

#### SFF - 2.5" Drives

HP ProLiant ML350G5 SFF SAS/SATA Rack CTO Chassis

395569-B21

#### Includes:

Embedded NC373i Multifunction Gigabit Server Adapter with TCP/IP Offload Engine

Integrated Smart Array E200i Controller

Eight Hot-Plug (SFF) SAS/SATA Drive Bays

Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)

Six USB ports

800W Hot-Plug Power Supply

Rack (5U) Form Factor

### Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Processors	HP E5320 ML350G5 FIO Kit	435513-L21
	HP E5310 ML350G5 FIO Kit	435512-L21
	HP X5160 ML350G5 FIO Kit	416891-L21
	HP X5150 ML350G5 FIO Kit	416890-L21
	HP X5140 ML350G5 FIO Kit	416889-L21
	HP X5130 ML350G5 FIO Kit	416888-L21
	HP X5120 ML350G5 FIO Kit	416887-L21
	HP X5110 ML350G5 FIO Kit	416886-L21
	HP X5050 ML350G5 FIO Kit	409400-L21
	HP X5060 ML350G5 FIO Kit	409401-L21
	HP X5080 ML350G5 FIO Kit	409397-L21
Base Memory	512 MB FBD PC2-5300 1 x 512 MB Kit	413507-B21
	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
	8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
Smart Array E200i Controller Cache	HP SA E200 64MB Cache FIO Kit	405102-B21
	<b>NOTE: Select this option for RAID 0/1/1+0</b>	
	128-MB Battery-Backed Write Cache (BBWC)	351580-B21
	<b>NOTE: Select this option for RAID 0/1/1+0/5.</b>	
Optical Drive	Floppy Drive ML350/370 G5 Kit	409582-B21
	CD-RW/DVD-ROM Combo Drive Option Kit	331346-B21
	HP 48X CD-ROM ALL (no screws)	384758-B21
	HP DVD±R/RW 16X Half Height	383974-B21
	16X DVD-ROM Drive Option Kit (Carbon)	217053-B21

### Configuration Information - Factory Integrated Models

#### Step 3: Choose Additional Options for Factory Integration

Controllers	HP Smart Array P400/256MB Controller <b>NOTE: SAS Controller supporting RAID 0/1/1+0/5.</b>	405132-B21
	HP Smart Array P600/256 BBWC Controller <b>NOTE: SAS Controller supporting RAID 0/1/1+0/5/6.</b>	337972-B21
	Smart Array 642 Controller <b>NOTE: U320 Controller.</b>	291967-B21
	Smart Array 6402/128 Controller <b>NOTE: U320 Controller.</b>	273915-B21
	Smart Array 6404/256 Controller <b>NOTE: U320 Controller.</b>	273914-B21
	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
Hard Drives	<b>SAS SFF Hot Plug Drives</b>	
	HP 146GB 3G SAS 10K SFF SP HDD	431958-B21
	HP 72GB 3G SAS 10K SFF SP HDD	375861-B21
	HP 36GB 3G SAS 10K SFF SP HDD	375859-B21
	<b>SAS LFF Hot Plug Drives</b>	
	HP 300GB 3G SAS 15K 3.5" SP HDD	431944-B21
	HP 146GB 3G SAS 15K 3.5" SP HDD	375872-B21
	HP 72GB 3G SAS 15K 3.5" SP HDD	375870-B21
	HP 36GB 3G SAS 15K 3.5" SP HDD	375868-B21
	<b>SATA SFF Hot Plug Drives</b>	
	HP 60GB 1.5G SATA 5.4K SFF HDD	379306-B21
	<b>3.5" SATA Hot Plug Drives</b>	
	HP 750GB 1.5G SATA 7.2K 3.5" HDD	432341-B21
	HP 500GB 1.5G SATA 7.2K 3.5" HDD	395473-B21
	HP 250GB 1.5G SATA 7.2K 3.5" HDD	349239-B21
	HP 160GB 1.5G SATA 7.2K 3.5" HDD	349238-B21
	HP 80GB 1.5G SATA 7.2K 3.5" HDD	349237-B21
Modems	Agere 2006 PCI Hi-Speed 56K Sof FIO <b>NOTE: This part number must be used for factory integration. For field integration (or as an additional "ship along" option) choose EK694AA.</b>	440519-B21

**NOTE:** For additional options, please refer to the "Options" section below.

### Options

**NOTE:** Some options may not be factory configurable. Please contact your local sales representative for additional information.

<b>HP ProLiant ML350 G5 Unique Options</b>	HP Redundant Fan ML350 G5 Kit	409579-B21
	HP x4/x8 PCI Express Bus Expander <b>NOTE:</b> The HP x4/x8 PCI Express Bus Expander kit converts 2 x4 PCI Express slots into a single x8 PCI Express slot for high performance x8 PCI Express cards	403724-B21
	HP PCI-X Expander Kit (2 x 64-bit 100MHz PCI-X slots) <b>NOTE:</b> The HP PCI-X Expander kit converts a single PCI Express slot (slot 6) into two full height, full length 64-bit 100MHz PCI-X slots	435670-B21
	HP Tower to Rack Conversion Kit - ML350 G5 Kit <b>NOTE:</b> See "Redundant Options" section below for Hot Plug Redundant Power supplies.	412640-B21

<b>ProLiant Essentials Value Pack Software</b>	<b>ProLiant Essentials Accelerated iSCSI Pack</b> ProLiant Essentials Accelerated iSCSI Pack, Single License <b>NOTE:</b> For additional Accelerated iSCSI Pack License Kits, please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12466_na/12466_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12466_na/12466_na.HTML</a>	407484-B21
	<b>ProLiant Essentials Intelligent Networking Pack</b> ProLiant Essentials Intelligent Networking Pack - Windows Edition, Single Server License <b>NOTE:</b> For use with a single server. Contains one license with a unique license activation key and documentation. <b>NOTE:</b> For additional ProLiant Intelligent Networking Pack - Windows License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12062_na/12062_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12062_na/12062_na.HTML</a>	436225-B21
	ProLiant Essentials Intelligent Networking Pack - Linux Edition, Single Server License <b>NOTE:</b> For additional ProLiant Essentials Intelligent Networking Pack - Linux License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12327_na/12327_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12327_na/12327_na.HTML</a>	436229-B21
	<b>ProLiant Essentials Performance Management Pack</b> ProLiant Essentials Performance Management Pack, Single-Server License <b>NOTE:</b> For use with a single server. Contains one license with a unique license activation key, HP Management CD and documentation. <b>NOTE:</b> The most recent version of the software can always be downloaded at <a href="http://www.hp.com/products/pmp">http://www.hp.com/products/pmp</a> . <b>NOTE:</b> For additional ProLiant Performance Management Pack License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11925_na/11925_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11925_na/11925_na.HTML</a>	306696-B21
	<b>HP ProLiant Essentials Remote Directory Memory Access (RDMA) Pack</b> HP ProLiant Essentials RDMA Pack for Embedded Multifunction Gigabit Server Adapters, 1 License HP ProLiant Essentials RDMA Pack for Standup Multifunction Gigabit Server Adapters, 1 License <b>NOTE:</b> For additional ProLiant Essentials RDM Pack License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12573_na/12573_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12573_na/12573_na.HTML</a>	407478-B22
	<b>ProLiant Essentials Rapid Deployment Pack</b>	407481-B22

### Options

Rapid Deployment Pack, Single-Server License	267196-B21
<b>NOTE:</b> This license allows 1 server to be deployed and managed via RDP.	
<b>NOTE:</b> For additional ProLiant Essentials Rapid Deployment Pack License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11053_na/11053_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11053_na/11053_na.HTML</a>	
<b>ProLiant Essentials Workload Management Pack</b>	
ProLiant Essentials Workload Management Pack, Single Server License	303284-B21
<b>NOTE:</b> For additional ProLiant Workload Management Pack License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11452_na/11452_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11452_na/11452_na.HTML</a>	
<b>ProLiant Essentials Virtualization Management Software</b>	
ProLiant Essentials Virtual Machine Management Pack, Single-Server License	435661-B21
<b>NOTE:</b> For use with a single server. Contains one license with a unique license activation key and documentation.	
ProLiant Essentials Server Migration Pack, Single-Migration License	435663-B21
<b>NOTE:</b> Contains one license, enabling 1 server migration, with a unique license activation key and documentation.	
<b>NOTE:</b> This license allows 1 server to be migrated from a physical server to a virtual machine. Or this license can be used to migrate a virtual machine from one virtualization layer i.e. VMware GSX to a different virtualization layer such as VMware ESX or Microsoft Virtual Server 2005.	
<b>NOTE:</b> For additional ProLiant Essentials Virtualization Management Software License Kits please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12328_na/12328_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12328_na/12328_na.HTML</a>	
<b>ProLiant Essentials Vulnerability and Patch Management Pack</b>	
ProLiant Essentials Vulnerability and Patch Management Pack, Single-Server License	371645-B21
<b>NOTE:</b> For use with a single server. Contains one license with a unique license activation key and documentation.	
<b>NOTE:</b> For additional ProLiant Vulnerability and Patch Management Pack License Kits, please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/12111_na/12111_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12111_na/12111_na.HTML</a>	
<b>NOTE:</b> Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <a href="http://www.hp.com/servers/proliantessentials">http://www.hp.com/servers/proliantessentials</a> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.	
<b>NOTE:</b> For more information regarding ProLiant Essentials Software, please see the following URL: <a href="http://www.hp.com/servers/proliantessentials">http://www.hp.com/servers/proliantessentials</a> .	

### Options

#### Remote Management **Integrated Lights-Out Advanced Pack**

Integrated Lights-Out Advanced Pack, 1 server

263825-B21

**Featuring:** Sophisticated virtual administration features for ultimate control of servers in the data centers and remote sites.

**NOTE:** For additional Integrated Light-Out Advanced Pack License Kits please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/11052\\_na/11052\\_na.HTML](http://h18000.www1.hp.com/products/quickspecs/11052_na/11052_na.HTML)

#### **Integrated Lights-Out Select Pack**

Integrated Lights-Out Select Pack, 1 server License

413119-B21

**Featuring:** sophisticated remote control and security features for HP BladeSystem servers and ProLiant ML/DL servers in text console environments.

**NOTE:** For additional Integrated Light-Out Select Pack License Kits please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/12362\\_na/12362\\_na.HTML](http://h18000.www1.hp.com/products/quickspecs/12362_na/12362_na.HTML)

#### ProLiant Software Maintenance Subscription

ProLiant Software Maintenance Subscription

355060-B21

ProLiant Software Maintenance Single Release

356573-B21

ProLiant Foundation Pack Single Release

356604-B21

**NOTE:** Please see the SmartStart QuickSpecs for additional information regarding the subscription purchase:

[http://h18000.www1.hp.com/products/quickspecs/North\\_America/11073.html](http://h18000.www1.hp.com/products/quickspecs/North_America/11073.html)

#### Processors

Quad-Core Intel Xeon Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)

435512-B21

Quad-Core Intel Xeon Processor E5310 (1.6 GHz, 80 Watts, 1066 FSB)

435513-B21

Dual-Core Intel Xeon Processor 5160 (3.0 GHz, 80 Watts, 1333 FSB)

416891-B21

Dual-Core Intel Xeon Processor 5150 (2.67 GHz, 65 Watts, 1333 FSB)

416890-B21

Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)

416889-B21

Dual-Core Intel Xeon Processor 5130 (2.0 GHz, 65 Watts, 1333 FSB)

416888-B21

Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)

416887-B21

Dual-Core Intel Xeon Processor 5110 (1.6 GHz, 65 Watts, 1066 FSB)

416886-B21

Dual-Core Intel Xeon Processor 5080 (3.73 GHz, 130 Watts, 1066 FSB)

409397-B21

Dual-Core Intel Xeon Processor 5060 (3.2 GHz, 130 Watts, 1066 FSB)

409401-B21

Dual-Core Intel Xeon Processor 5050 (3.0 GHz, 95 Watts, 667 FSB)

409400-B21

#### Memory (DIMMs)

512 MB FBD PC2-5300 1 x 512 MB Kit

413507-B21

1 GB FBD PC2-5300 2 x 512 MB Kit

397409-B21

2 GB FBD PC2-5300 2 x 1 GB Kit

397411-B21

4 GB FBD PC2-5300 2 x 2 GB Kit

397413-B21

8 GB FBD PC2-5300 2 x 4 GB Kit

397415-B21

#### Optical Drives

Floppy Drive ML350/370 G5 Kit

409582-B21

CD-RW/DVD-ROM Combo Drive Option Kit

331346-B21

HP DVD±R/RW 16X Half Height

383974-B21

16X DVD-ROM Drive Option Kit (Carbon)

217053-B21

### Options

Serial Port Kit	Parallel/Serial Port ML370/350 G5 Kit	401222-B21
Hard Drives	<b>SAS SFF Hot Plug Drives</b> HP 146GB 3G SAS 10K SFF SP HDD HP 72GB 3G SAS 10K SFF SP HDD HP 36GB 3G SAS 10K SFF SP HDD	431958-B21 375861-B21 375859-B21
	<b>SAS LFF Hot Plug Drives</b> HP 300GB 3G SAS 15K 3.5" SP HDD HP 146GB 3G SAS 15K 3.5" SP HDD HP 72GB 3G SAS 15K 3.5" SP HDD HP 36GB 3G SAS 15K 3.5" SP HDD	431944-B21 375872-B21 375870-B21 375868-B21
	<b>NOTE:</b> Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: <a href="http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.HTML</a>	
	<b>SATA SFF Hot Plug Drives</b> HP 60GB 1.5G SATA 5.4K SFF HDD	379306-B21
	<b>NOTE:</b> SATA hard drives have a 1-year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: <a href="http://h18000.www1.hp.com/products/quickspecs/12091_na/12091_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12091_na/12091_na.HTML</a>	
	<b>3.5" SATA Hot Plug Drives</b> HP 750GB 1.5G SATA 7.2K 3.5" HDD HP 500GB 1.5G SATA 7.2K 3.5" HDD HP 250GB 1.5G SATA 7.2K 3.5" HDD HP 160GB 1.5G SATA 7.2K 3.5" HDD HP 80GB 1.5G SATA 7.2K 3.5" HDD	432341-B21 395473-B21 349239-B21 349238-B21 349237-B21
	<b>NOTE:</b> SATA hard drives have a 1-year warranty. Please see the SATA Hard Drive QuickSpecs for additional technical information on the hard drives Support details, please see the following: <a href="http://h18000.www1.hp.com/products/quickspecs/11940_na/11940_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11940_na/11940_na.HTML</a>	
Storage Controllers	<b>SAS Controllers</b> <b>Smart Array E200 Controller</b> HP Smart Array E200/64MB Controller HP Smart Array E200/128 BBWC Controller 128-MB Battery-Backed Write Cache (BBWC) <b>NOTE:</b> Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller. <b>Smart Array P400 Controller</b> HP Smart Array P400/512MB BBWC Controller <b>NOTE:</b> Supports RAID 0/1/1+0/5/6. HP Smart Array P400/256MB Controller <b>NOTE:</b> Supports RAID 0/1/1+0/5. 512MB Battery-backed cache (BBWC) upgrade <b>NOTE:</b> for Smart Array P400 Controller. Battery-backed write cache (BBWC) upgrade <b>NOTE:</b> for Smart Array P400 Controller.	409180-B21 411508-B21 351580-B21 814000-B21 411064-B21 405132-B21 405148-B21 383280-B21

### Options

Smart Array P400 Battery Attach Kit	417836-B21
<b>NOTE:</b> This option kit contains a 24" battery cable and adhesive material for installing a battery into the server if a Smart Array P400 is integrated outside of the factory. For all solutions, please refer to the server QuickSpecs and User's Manual for detailed installation instructions.	
<b>Smart Array P600 Controller</b>	
HP Smart Array P600/256 BBWC Controller	337972-B21
<b>NOTE:</b> Supports external drive attach.	
512MB Battery-backed write cache (BBWC) upgrade	372538-B21
<b>NOTE:</b> For Smart Array P600 Controller.	
<b>Smart Array P800 Controller</b>	
HP Smart Array P800/512 BBWC Controller	381513-B21
<b>NOTE:</b> Supports external drive attach.	
<b>NOTE:</b> Please see the following QuickSpecs additional information: <a href="http://h18000.www1.hp.com/products/quickspecs/12460_na/12460_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12460_na/12460_na.HTML</a> (Smart Array E200 Controller)	
<a href="http://h18000.www1.hp.com/products/quickspecs/12400_na/12400_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12400_na/12400_na.HTML</a> (Smart Array P400 Controller)	
<a href="http://h18000.www1.hp.com/products/quickspecs/12247_na/12247_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12247_na/12247_na.HTML</a> (Smart Array P600 Controller)	
<a href="http://h18000.www1.hp.com/products/quickspecs/12616_na/12616_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12616_na/12616_na.HTML</a> (Smart Array P800 Controller)	
<b>SAS HBA</b>	
HP 8 Internal Port SAS HBA with RAID	347786-B21
<b>NOTE:</b> RAID 0,1 supported.	
<b>NOTE:</b> Please see the HBA QuickSpecs for additional information: <a href="http://h18004.www1.hp.com/products/quickspecs/12332_na/12332_na.html">http://h18004.www1.hp.com/products/quickspecs/12332_na/12332_na.html</a> (8 Internal Port SAS HBA)	
<b>SCSI Controllers for External Drive/Storage Support</b>	
Smart Array 6402/128 Controller	273915-B21
<b>NOTE:</b> Ultra320 SCSI.	
Smart Array 6404/256 Controller	273914-B21
<b>NOTE:</b> Ultra320 SCSI.	
Smart Array 642 Controller	291967-B21
<b>NOTE:</b> Ultra320 SCSI.	
128MB Battery-Backed Write Cache (BBWC)	351580-B21
<b>NOTE:</b> Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.	
64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
<b>SCSI HBA</b>	
HP SC11Xe Host Bus Adapter	412911-B21
<b>NOTE:</b> Supports external drive attach.	
<b>NOTE:</b> Please see the following Controller or SCSI Adapter QuickSpecs for Technical Specifications such as PCI Bus, PCI Peak Data Transfer Rate, SCSI Protocols supported, SCSI Peak Data Transfer Rate, Channels, SCSI Ports, Drives supported, Cache, RAID support, and additional information: <a href="http://h18000.www1.hp.com/products/quickspecs/11943_na/11943_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11943_na/11943_na.HTML</a> (Single Channel Ultra320 SCSI HBA)	
<a href="http://h18000.www1.hp.com/products/quickspecs/11587_na/11587_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11587_na/11587_na.HTML</a> (Smart Array 6400 Series)	
<a href="http://h18000.www1.hp.com/products/quickspecs/12069_na/12069_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12069_na/12069_na.HTML</a> (Smart Array 642)	
<a href="http://h18000.www1.hp.com/products/quickspecs/10429_na/10429_na.HTML">http://h18000.www1.hp.com/products/quickspecs/10429_na/10429_na.HTML</a>	

### Options

(SCSI Adapter)

[http://h18000.www1.hp.com/products/quickspecs/12566\\_na/12566\\_na.HTML](http://h18000.www1.hp.com/products/quickspecs/12566_na/12566_na.HTML)

(SCSI HBA)

---

<b>Communications</b>	HP NC150T PCI 4-port Gigabit 1000T Combo Switch Adapter	367132-B21
	HP NC310F PCI-X 1000SX Gigabit Server Adapter	368169-B21
	HP NC320T PCI Express 1000T Gigabit Server Adapter	367047-B21
	HP NC340T PCI-X 4-port 1000T Gigabit Server Adapter	391661-B21
	HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
	HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
	HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
	HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter	394795-B21
	HP NC1020 PCI 1000T Gigabit Server Adapter	353377-B21
	<b>NOTE:</b> Any NIC (except the NC1020) on the option list can be used for redundancy with the embedded NC373i Multifunction Gigabit NIC. When teaming with other NICs or with the embedded NIC, the lack of Jumbo Frames and LSO features on the NC1020 will cause high end NICs to have those features disabled.	
	2006 Agere PCI high-speed international soft modem	EK694AA
	HP NC510F PCIe 10 Gigabit Server Adapter	414126-B21
	<b>NOTE:</b> A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510F adapter.	
	HP NC510C PCIe 10 Gigabit Server Adapter	414129-B21
	<b>NOTE:</b> A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510C adapter.	
<b>Redundant Options</b>	Hot Plug Redundant Power Supply 350/370/380 G5 IEC Kit	399771-B21
	Hot Plug Redundant Power Supply 350/370/380 G5 NEMA Kit	399771-001
	Redundant Fan ML350 G5 Kit	409579-B21
<b>Tape Drives</b>	<b>NOTE:</b> A separate SCSI Controller is required for connecting SCSI tape drives to this server.	
	<b>NOTE:</b> For the complete listing of Tape Drive offerings, please see: <a href="http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html">http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html</a>	
	For recommended tape drive offerings for this ProLiant server see the following:	
	<b>USB Tape Drives</b>	
	HP StorageWorks DAT 72 USB Internal Tape Drive (Carbonite)	DW026A
	<b>SAS Tape Drives</b>	
	<b>NOTE:</b> Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.	
	HP StorageWorks Ultrium 448 SAS Internal Tape Drive	DW085A
	HP StorageWorks Ultrium 920 SAS Internal Tape Drive	EH847A
	<b>NOTE:</b> Please refer to the "Tape Drives, Tape Autoloaders & Tape Libraries" table in the Storage section of this document for a list of SAS controllers with tape support.	



### Options

#### Ultrium Tape Drives

HP StorageWorks Ultrium 232 Internal Tape Drive (Carbonite)	DW064A
HP StorageWorks Ultrium 460 Internal Tape Drive (Carbon)	Q1518B
HP StorageWorks Ultrium 448 Internal Tape Drive (Carbonite)	DW016A
HP StorageWorks Ultrium 920 SCSI Internal Tape Drive	EH841A
HP StorageWorks Ultrium 960 Internal Tape Drive (Carbonite)	Q1538A

**NOTE:** Please see the HP StorageWorks Ultrium Tape Drive QuickSpecs for additional options such as controllers, media, and other related items:

[http://h18006.www1.hp.com/products/quickspecs/11739\\_na/11739\\_na.html](http://h18006.www1.hp.com/products/quickspecs/11739_na/11739_na.html)

[http://h18006.www1.hp.com/products/quickspecs/12128\\_na/12128\\_na.html](http://h18006.www1.hp.com/products/quickspecs/12128_na/12128_na.html)

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>.

#### Internal DAT Drives

HP StorageWorks DAT 72 SCSI Internal Tape Drive (Carbon)	Q1522B
--	--------

---

#### Tape Autoloaders

##### HP StorageWorks DAT Autoloader

HP StorageWorks DAT 72x10 tape autoloader	AE313A
---	--------

##### HP StorageWorks 1/8 Tape Autoloader

HP StorageWorks 1/8 Ultrium 960 Tape Autoloader	AF204A
---	--------

HP StorageWorks 1/8 Ultrium 920 G2 Tape Autoloader	AH165A
--	--------

HP StorageWorks 1/8 Ultrium 448 G2 Tape Autoloader	AH164A
--	--------

HP StorageWorks 1/8 Ultrium 232 G2 Tape Autoloader	AH163A
--	--------

HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit	AH166A
---	--------

**NOTE:** Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions

1/8 Tape Autoloader Rackmount Kit	C9268R
-----------------------------------	--------

**NOTE:** Required to install the unit in a standard 19-inch rack; includes rails and rackmount instructions

**NOTE:** Please reference the Tape Autoloader QuickSpecs at

<http://www.hp.com/go/automation> for additional information needed to create a

complete solution; reference current compatibility information at

<http://www.hp.com/go/ebs>

### Options

#### Tape Libraries

##### HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 Ultrium 960 Drive Library	AG115A
HP StorageWorks MSL2024 1 Ultrium 960 4GB FC Drive Library	AG326B
HP StorageWorks MSL2024 1 Ultrium 920 Drive Library	AH169A
HP StorageWorks MSL2024 2 Ultrium 920 Drive Library	AH170A
HP StorageWorks MSL2024 1 Ultrium 448 Drive Library	AG116A
HP StorageWorks MSL2024 2 Ultrium 448 Drive Library	AG117A

##### HP StorageWorks MSL4048 Tape Library

HP StorageWorks MSL4048 1 Ultrium 448 Drive Library	AG320A
HP StorageWorks MSL4048 2 Ultrium 448 Drive Library	AG321A
HP StorageWorks MSL4048 1 Ultrium 920 Drive Library	AH171A
HP StorageWorks MSL4048 2 Ultrium 920 Drive Library	AH172A
HP StorageWorks MSL4048 1 Ultrium 960 Drive Library	AG322A
HP StorageWorks MSL4048 1 Ultrium 960 4GB FC Drive Library	AG324B
HP StorageWorks MSL4048 2 Ultrium 960 Drive Library	AG323A
HP StorageWorks MSL4048 2 Ultrium 960 4GB FC Drive Library	AG325B

##### HP StorageWorks MSL6000 Tape Library

##### Ultrium 960 technology

HP StorageWorks MSL6030 1 Ultrium 960 Dr LVDS Library	AD606B
HP StorageWorks MSL6030 1 Ultrium 960 Dr FC Library	AD608B
HP StorageWorks MSL6030 2 Ultrium 960 Dr LVDS Library	AD607B
HP StorageWorks MSL6030 2 Ultrium 960 Dr FC Library	AD609B

##### Ultrium 460 technology

HP StorageWorks MSL6030 1 Ultrium 460 Dr LVDS Library	AD598B
HP StorageWorks MSL6030 1 Ultrium 460 Dr FC Library	AD600B
HP StorageWorks MSL6030 2 Ultrium 460 Dr LVDS Library	AD599B
HP StorageWorks MSL6030 2 Ultrium 460 Dr FC Library	AD601B

**NOTE:** Please reference the MSL2024, MSL4048 and MSL6000 Tape Library QuickSpecs at <http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at <http://www.hp.com/go/ebs>

#### HP Data Protector Express Software

HP DP Express Backup Server Upgrade for ProLiant Software
HP DP Express Package for Microsoft Small Business Server

BB117AP
BB118AA

**NOTE:** To obtain a free licensed copy of HP Data Protector Express for ProLiant edition software, please visit the "Protect Your Data" link accessible from your ProLiant server's System Management Homepage (SMH) software (SmartStart 7.5 or later).

**NOTE:** Please see the HP Data Protector Express QuickSpecs for additional information regarding the purchase of HP Data Protector Express software: [http://h18000.www1.hp.com/products/quickspecs/12337\\_na/12337\\_na.html](http://h18000.www1.hp.com/products/quickspecs/12337_na/12337_na.html)

### Options

<b>HP StorageWorks Modular Smart Array 20</b>	HP StorageWorks Modular Smart Array 20 <b>NOTE:</b> Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies.	335921-B21
	HP StorageWorks Modular Smart Array 20 Starter Kit <b>NOTE:</b> Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies. Includes Smart Array 6402/128 Controller. <b>NOTE:</b> The Modular Smart Array Enclosure 20 Family supports the SATA 1.5Gb/s 3.5" Hot Plug Hard Drives.	366172-B21
<b>HP StorageWorks Modular Smart Array 30</b>	HP StorageWorks Modular Smart Array 30 SB <b>NOTE:</b> Rack-mountable 14 drive enclosure with single bus, redundant power supplies	302969-B21
	HP StorageWorks Modular Smart Array 30 DB <b>NOTE:</b> Rack-mountable 14 drive enclosure with dual bus, redundant power supplies <b>NOTE:</b> The Modular Smart Array Enclosure 30 Family supports the Wide Ultra3, Ultra320 Hot Plug Hard Drives.	302970-B21
<b>HP StorageWorks Modular Smart Array 50</b>	HP StorageWorks Modular Smart Array 50 Enclosure <b>NOTE:</b> Please see the Modular Smart Array 50 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: <a href="http://h18000.www1.hp.com/products/quickspecs/12245_na/12245_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12245_na/12245_na.HTML</a>	364430-B21
<b>HP StorageWorks Modular Smart Array 500</b>	HP StorageWorks Modular Smart Array 500 Generation 2 <b>NOTE:</b> Please see the Modular Smart Array 500 Generation 2 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: <a href="http://h18000.www1.hp.com/products/quickspecs/11956_na/11956_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11956_na/11956_na.HTML</a>	335880-B21
<b>HP StorageWorks Modular Smart Array 1000</b>	HP StorageWorks Modular Smart Array 1000 <b>NOTE:</b> Please see the Modular Smart Array 1000 QuickSpecs for additional options and configuration information at <a href="http://h18000.www1.hp.com/products/quickspecs/11033_na/11033_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11033_na/11033_na.HTML</a>	201723-B22
<b>HP StorageWorks Modular Smart Array 1500 cs</b>	Modular Smart Array 1500 Controller Shelf <b>NOTE:</b> Please see the StorageWorks Modular SAN Array 1500 cs QuickSpecs for additional options and configuration information at: <a href="http://www.hp.com/go/MSA1500cs">http://www.hp.com/go/MSA1500cs</a>	AA986A

### Options

<b>Cluster Options</b>	ProLiant Cluster Starter Kit  <b>NOTE:</b> For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11935_na/11935_na.html">http://h18000.www1.hp.com/products/quickspecs/11935_na/11935_na.html</a>	364023-B22
	HP HAF200 for Entry SAN Cluster  <b>NOTE:</b> For additional information regarding the ProLiant Cluster for Entry Level SAN please see the following QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11932_na/11932_na.html">http://h18000.www1.hp.com/products/quickspecs/11932_na/11932_na.html</a>	364026-B22
	<b>NOTE:</b> For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: <a href="http://www.hp.com/solutions/highavailability/oracle">http://www.hp.com/solutions/highavailability/oracle</a>	
	HP Serviceguard for Linux ProLiant Cluster A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (2 node license cluster kit)	305199-B26
	HP Serviceguard for Linux A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (single license version)	307754-B26
	HP Serviceguard for Linux and Red Hat Global File System - 1 year subscription	T2798AA#001
	HP Serviceguard for Linux and Red Hat Global File System - 3 years subscription	T2798AA#003
	<b>NOTE:</b> For additional information regarding HP Serviceguard for Linux, please see the following QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11518_na/11518_na.html">http://h18000.www1.hp.com/products/quickspecs/11518_na/11518_na.html</a>	
	<b>NOTE:</b> For configuration/certification options for HP Serviceguard for Linux please go to: <a href="http://www.hp.com/info/sglx">http://www.hp.com/info/sglx</a>	

<b>StorageWorks Options</b>	<b>NOTE:</b> The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: <a href="http://h18006.www1.hp.com/storage/saninfrastructure/hba.html">http://h18006.www1.hp.com/storage/saninfrastructure/hba.html</a>	
	HP StorageWorks FC2142SR 4Gb PCI-e HBA	A8002A
	HP StorageWorks FC2242SR Dual Channel 4 Gb PCI-e HBA	A8003A
	HP StorageWorks FC1142SR 4Gb PCI-e HBA	AE311A
	HP StorageWorks FC1242SR Dual Channel 4 Gb PCI-e HBA	AE312A
	HP StorageWorks FC2143 4Gb PCI-X 2.0 -to-Fibre Channel HBA	AD167A
	HP StorageWorks FC2243 Dual Channel 4Gb PCI-X 2.0 HBA	AD168A
	HP StorageWorks FC1143 4Gb PCI-X 2.0 HBA	AB429A
	HP StorageWorks FC1243 Dual Channel 4Gb PCI-X 2.0 HBA	AE369A

<b>Uninterruptible Power Systems – Tower</b>	HP, T1000 UPS	AF403A
	HP, T1500 UPS	AF406A
	HP, R/T 2200 UPS	AF409A

<b>Uninterruptible Power Systems - Rack</b>	HP, R1.5kVA UPS, 1U	AF419A
	HP R3000 VA UPS, 2U, L5-30	AF422A
	HP R3000 VA UPS, 2U, L6-20	AF423A
	HP R5500 VA UPS	AF426A

### Options

<b>HP Monitored Power Distribution Unit (PDU)</b>	<b>HP Monitored Power Distribution Unit: Full Rack Version</b>	
	17.3 kVA Monitored PDU Model S2324	AF503A
	8.6 kVA Monitored PDU Model S1324	AF504A
	16.6 kVA Monitored PDU Model S2140	AF505A
	8.3 kVA Monitored PDU Model S1140	AF506A
	22 kVA Monitored PDU Model S2316	AF507A
	11 kVA Monitored PDU Model S1316	AF508A
	14.7 kVA Monitored PDU Model S2132	AF509A
	7.3 kVA Monitored PDU Model S1132	AF510A
	4.9kVA Monitored PDU model S124	AF914A
	7.3kVA Monitored PDU model S132	AF915A

<b>Modular PDUs 1U/0U</b> (Up to 32 outlets)	<b>NOTE:</b> 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).	
<b>NOTE:</b> 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).	HP Modular Power Distribution Units (mPDU), Low Volt Model, 24A (100-127 VAC)	252663-D71
	<b>NOTE:</b> This mPDU (252663-D71) may also be used to connect the low volt model of the UPS R3000 XR.	
	HP Modular Power Distribution Units (mPDU), High Volt Model, 24A (200-240 VAC)	252663-D72
	HP Modular Power Distribution Units (mPDU), High Volt Model, 40A (200-240 VAC)	252663-B21
	<b>NOTE:</b> This mPDU (252663-B21), 40A model has a hardwired input.	
	HP Modular Power Distribution Units (mPDU), High Volt Model, 16A (200-240 VAC) (WW)	252663-B24
	<b>NOTE:</b> This PDU has a detachable input power cord and allows for adaptability to country specific power requirements. This model may also be used with the high volt UPSs R3000 XR and R6000 For North America, need to order cable PN 340653-001.	
	HP Modular Power Distribution Unit (mPDU), High Volt Model, 40A, Attached Cord	252663-D73
	<b>NOTE:</b> Please see the following Modular Power Distribution Unit (Zero-U/1U Modular PDUs) QuickSpecs for additional options including shorter jumper cables and country specific power cords: <a href="http://h18000.www1.hp.com/products/quickspecs/11041_na/11041_na.HTML">http://h18000.www1.hp.com/products/quickspecs/11041_na/11041_na.HTML</a>	

<b>USB Options</b>	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	USB 1.44-MB External Diskette Drive (Carbonite)	DC141B
	HP USB 04 Standard Keyboard	DT528A#ABA
	USB 2.0 4-port HUB	DG954A
	HP 1GB Drive Key II- USB 2.0 Flash Drive	AG382AA
	512MB HP Drive Key II (USB 2.0)	ED516AA

<b>Rack Conversion Kit</b>	HP ML350 G5 Tower to Rack Conversion Kit	412640-B21
	ProLiant DL380 G4, ML370 G4, ML350 G4 Shipping Bracket for Round Hole Racks	371482-B21
	<b>NOTE:</b> This kit is required if the server will be configured and shipped within a round hole rack.	

### Options

<b>HP Rack 5000 Series</b> (Graphite Metallic)	HP 5642 Rack-Unassembled	358254-B21
<b>NOTE:</b> Please see the HP Rack 5642 QuickSpecs for additional part numbers and Technical Specifications such as height, width, depth, weight, and color: <a href="http://h18000.www1.hp.com/products/quickspecs/12074_na/12074_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12074_na/12074_na.HTML</a>		
<b>NOTE:</b> For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a> .		
<hr/>		
<b>HP Rack 10000 G2 Series</b> (Carbon/Graphite Metallic)	10642 G2 (42U) Rack Cabinet - Pallet	AF001A
	10642 G2 (42U) Rack Cabinet - Shock Pallet	AF002A
	10642 G2 (42U) Rack Cabinet - Crated	AF003A
	10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet	AF004A
	10636 G2 (36U) Rack Cabinet - Pallet	AF011A
	10636 G2 (36U) Rack Cabinet - Shock Pallet	AF012A
	10636 G2 (36U) Rack Cabinet - Crated	AF013A
	10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet	AF014A
<b>NOTE:</b> It is mandatory to use a shock pallet when shipping racks with equipment installed.		
<b>NOTE:</b> Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color: <a href="http://h18000.www1.hp.com/products/quickspecs/12402_na/12402_na.HTML">http://h18000.www1.hp.com/products/quickspecs/12402_na/12402_na.HTML</a>		
<b>NOTE:</b> For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a> .		
<hr/>		
<b>HP Rack 10000 Series</b> (Graphite Metallic)	10642 (42U) Infrastructure Rack (Low Voltage)	379006-001
	10642 (42U) Infrastructure Rack (High Voltage)	379005-001
	HP S10614 (14U) Rack Cabinet - Shock Pallet	292302-B22
	HP 10842 (42U) Rack Cabinet - Pallet	257415-B21
	HP 10842 (42U) Rack Cabinet - Shock Pallet	257415-B22
	HP 10647 (47U) Rack Cabinet - Pallet	245160-B21
	HP 10647 (47U) Rack Cabinet - Crated	245160-B23
	HP 10622 (22U) Rack Cabinet - Pallet	245163-B21
	HP 10622 (22U) Rack Cabinet - Shock Pallet	245163-B22
	HP 10622 (22U) Rack Cabinet - Crated	245163-B23
<b>NOTE:</b> xxxxx-B21 (pallet) used to ship empty racks shipped on a truck. -B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels). xxxxx-B23 (crated) used for air shipments of empty racks.		
<b>NOTE:</b> It is mandatory to use a shock pallet in order to ship racks with equipment installed. Not all Compaq equipment is qualified to be shipped in the Rack 10000 series.		
<b>NOTE:</b> Please see the Rack 10000 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color: <a href="http://h18000.www1.hp.com/products/quickspecs/10995_na/10995_na.HTML">http://h18000.www1.hp.com/products/quickspecs/10995_na/10995_na.HTML</a>		
<b>NOTE:</b> For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a>		

### Options

<b>Keyboards and Monitors</b>	TFT7210R Rack Mounted 17" Monitor	348373-B21
	<b>NOTE:</b> For a complete list of Monitors please view the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a>	
	TFT7600 Rackmount Keyboard Monitor	AG052A
	1U Rackmount Keyboard with USB	AG072A
	<b>NOTE:</b> For additional information regarding Rack Options, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a> .	
 <b>HP KVM Switch Options</b>	2x1x16 IP Console Switch with Virtual Media	AF601A
	4x1x16 IP Console Switch with Virtual Media	AF602A
	2x16 Server Console Switch with Virtual Media	AF600A
	PS/2 Virtual Media Interface Adapter, 1 pack	AF604A
	<b>NOTE:</b> Requires PS/2 and one USB port on server.	
	Server Console Switch (KVM), 0 x 1 x 8 port	336044-B21
	Server Console Switch (KVM), 0 x 2 x 16 port	336045-B21
	PS/2 Interface Adapter, 1 pack	262588-B21
	PS/2 Interface Adapter, 8 pack	262587-B21
	USB Interface Adapter, 1 pack	336047-B21
	Serial Interface adapter - 1 Pack with power supply	373035-B21
	<b>NOTE:</b> Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	
	HP 1x 4 USB/PS2 KVM Switch, TT	371301-D71
	HP 1x 4 USB/PS2 KVM Switch, RM	371302-B21
	HP PS2 KVM Cable with audio, 6', 2-pack	371730-B21
	HP USB KVM Cable with audio, 6', 2-pack	371729-B21
	<b>NOTE:</b> For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	
 <b>HP Serial Console Server Options</b>	HP 16 Port Serial Console Server	AF101A
	HP 48 Port Serial Console Server	AF102A
	Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
	Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A
	<b>NOTE:</b> Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	
	<b>NOTE:</b> For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	

### Options

<b>Service and Support Offerings (HP Care Pack Services)</b>	<b>Hardware Services On-site Service</b>	
	4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years (Electronic)	U4512E
	4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years (Electronic)	U4513E
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years (Electronic)	U4514E
	<b>O/S and Hardware Installation</b>	
	Hardware Installation (Electronic)	U4522E
	Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays. (Electronic)	U4523E
	<b>Support Plus</b>	
	Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays. (Electronic)	U4524E
	<b>Support Plus 24</b>	
	Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U4525E
	Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U6308E
	Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U8330E
	<b>NOTE:</b> For more information, customer/resellers can contact <a href="http://www.hp.com/services/carepack">http://www.hp.com/services/carepack</a>	

### Memory

**NOTE:** Memory configurations listed do not apply to "Factory Integrated Models".

#### HP ProLiant ML350 G5 Memory Configuration

The HP ProLiant ML350 G5 requires memory interleaving when more than one DIMM is installed. For interleaving, DIMMs must be configured in identical pairs. The system will not boot properly if multiple DIMMs of varying density or type are installed in the system.

#### Standard Memory

All HP ProLiant ML350 G5 models ship with PC2-5300 Fully Buffered DIMMs (DDR2-667).

Entry models include a single 512 MB DIMM.

Base models include two 512 MB DIMMs (1GB total memory).

Factory Integrated Models include the memory capacity of your choice.

#### Common Memory Configuration

Valid DIMM pair combinations use slots 1/5, slots 2/6, slots 3/7, and slots 4/8. Maximum supported memory is 16 GB for Dual-Core and 32 GB on Quad-Core models.

**NOTE:** Charts does not represent all possible memory configurations.

Memory		Slot							
		1A	2B	3C	4D	5A	6B	7C	8D
Standard	1 GB	512 MB	Empty	Empty	Empty	512 MB	Empty	Empty	Empty
Optional	11 GB	512 MB	Empty	2 GB	2 GB	512 MB	2 GB	2 GB	2 GB
Maximum	16 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB

Following are memory options available from HP:

- 512MB FBD PC2-5300 1 x 512 MB Kit 413507-B21
- 1 GB FBD PC2-5300 2 x 512 MB Kit 397409-B21
- 2 GB FBD PC2-5300 2 x 1 GB Kit 397411-B21
- 4 GB FBD PC2-5300 2 x 2 GB Kit 397413-B21
- 8 GB FBD PC2-5300 2 x 4 GB Kit 397415-B21

#### Online spare memory configuration

FBDIMMs can either be single-rank or dual-rank. Certain FBDIMM configuration requirements are based on these classifications. A dual-rank FBDIMM is similar to having two separate FBDIMMs, or ranks, on the same module. Although only a single FBDIMM module, a dual-rank FBDIMM acts as two separate FBDIMMs.

In online spare mode, a single rank of memory acts as the spare memory. For single-rank FBDIMMs, the entire FBDIMM acts as the spare memory. For a dual-rank FBDIMM, only half of the FBDIMM acts as the spare memory while the other half is available for operating system and application usage.

Online spare FBDIMM configuration requirements (in addition to general configuration requirements):

- When only bank A is being used, it must be fully populated with dual-rank FBDIMMs.
- For optimum memory usage, HP recommends all FBDIMMs be the same size with the same HP part number. If different sized FBDIMMs are used, a portion of the installed memory may not be utilized.

In online spare mode, FBDIMMs must be populated as specified in the following table:

- Configuration 1 (Bank A only) is only supported if using bank A, populated with dual-rank FBDIMMs.
- After installing FBDIMMs, use RBSU to configure the system for online spare memory support.

Bank A 1A and 5A	Bank B 2B and 6B	Bank C 3C and 7C	Bank D 4D and 8D
X	—	—	—
X	X	—	—
X	X	X	X



### Storage



1 - 6      6 x 3.5" (LFF) Hot-Plug SAS/SATA hard drive bays

Or

1 - 8      8 x 2.5" (SFF) Hot-Plug SAS/SATA hard drive bays

A,B,C,D      Available half height media bays

E      48x CD-ROM

### Drive Support

	Quantity Supported	Position Supported	Controller
<b>Removable Media</b>			
1.44-MB Diskette Drive	Up to 1	A, B, C, D, E	Integrated floppy controller
IDE (ATAPI) CD-ROM Drive	Up to 2	A, B, C, D, E	Integrated IDE
HP DVD±R/RW 16X Half Height	Up to 2	A, B, C, D, E	Integrated IDE
DVD-ROM Drive Option Kit	Up to 2	A, B, C, D, E	Integrated IDE

### Storage

#### Hard Drives

##### Hot Plug SATA 3.5" Drives

	Quantity Supported	Position Supported	Controller
750GB 1.5G SATA 7.2K	Up to 6	1-6	HP Smart Array E200i/64MB Controller
500GB 1.5G SATA 7.2K			HP Smart Array E200i/128 BBWC Controller
250GB 1.5G SATA 7.2K			HP Smart Array P400/256MB Controller
160GB 1.5G SATA 7.2K			HP Smart Array P400/512MB BBWC Controller
80GB 1.5G SATA 7.2K			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller
			HP 6-Port SATA RAID Controller

##### Hot Plug SFF SATA Drives

	Quantity Supported	Position Supported	Controller
60GB 1.5G SATA 5.4K	Up to 8	1-8	HP Smart Array E200i/64MB Controller
			HP Smart Array E200i/128 BBWC Controller
			HP Smart Array P400/256MB Controller
			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller
			HP 6-Port SATA RAID Controller

**NOTE:** HP Systems Insight Manager should not be used to view the status of SATA hard drives and SATA RAID configurations.

##### Hot Plug SFF SAS 2.5" Drives

	Quantity Supported	Position Supported	Controller
146GB 3G SAS 10K SP	Up to 8 SFF	1-8	HP Smart Array E200i/64MB Controller
72GB 3G SAS 10K SP			HP Smart Array E200i/128 BBWC Controller
36GB 3G SAS 10K SP			HP Smart Array P400/256MB Controller
			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller
			HP 6-Port SATA RAID Controller

##### Hot Plug SAS 3.5" Drives

	Quantity Supported	Position Supported	Controller
300GB 3G SAS 15K 3.5"	Up to 6 LFF	1-6	HP Smart Array E200i/64MB Controller
SP			HP Smart Array E200i/128 BBWC Controller
146GB 3G SAS 15K 3.5"			HP Smart Array P400/256MB Controller
SP			HP Smart Array P400/512MB BBWC Controller
72GB 3G SAS 15K 3.5"			HP Smart Array P600/256 BBWC Controller
SP			HP Smart Array P800/512 BBWC Controller
36GB 3G SAS 15K 3.5"			HP 6-Port SATA RAID Controller
SP			

### Storage

#### External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
Modular Smart Array 20 Family	Up to 2	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller
Modular Smart Array 30 Family	Up to 2	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller
Modular Smart Array 50 Enclosure	Up to 2	External	HP Smart Array P600/256 BBWC Controller
Modular Smart Array 500 G2	1	External	Please see the Modular Smart Array 500 or 500 G2 QuickSpecs for the latest list of supported HBAs: <a href="http://www.hp.com/go/msa500">http://www.hp.com/go/msa500</a> .
Modular Smart Array 1500 cs or 1000	Please see the Modular Smart Array 1500 cs or Modular Smart Array 1000 QuickSpecs links below to determine configuration requirements		Please see the Modular Smart Array 1500 cs or Modular Smart Array 1000 QuickSpecs (URL below) for the latest list of supported HBAs.

Modular Smart Array 1000: [http://h18000.www1.hp.com/products/quickspecs/11033\\_na/11033\\_na.HTML](http://h18000.www1.hp.com/products/quickspecs/11033_na/11033_na.HTML)

Modular Smart Array 1500 cs: <http://www.hp.com/go/MSA1500cs>

### Tape Drives, Tape Autoloaders, & Tape Libraries

**NOTE:** For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:

[http://h18000.www1.hp.com/products/quickspecs/North\\_America/10233.html](http://h18000.www1.hp.com/products/quickspecs/North_America/10233.html)

**NOTE:** For an up-to-date listing of the latest O/S Support details for each of the Tape Autoloaders and Tape Libraries listed below, please see the following:

[http://h18000.www1.hp.com/products/quickspecs/North\\_America/10809.html](http://h18000.www1.hp.com/products/quickspecs/North_America/10809.html)

**NOTE:** SAS Tape Drives: Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

**NOTE:** For complete listing of tape drive offerings see

<http://www.hp.com/products/1/storage/compatibility/tapebackup/ISS/index.html>

	Position Supported	Controller	Controller/HBA Option Kit Part Number
HP StorageWorks Tape Drives, USB Internal	A-D	Internal USB 2.0 port	N/A

DAT 24 USB  
DAT 40 USB  
DAT 72 USB

### Storage

<b>HP StorageWorks Tape Drives, USB External</b> DAT 24 USB DAT 40 USB DAT 72 USB	External	USB 2.0 port	N/A
<b>HP StorageWorks SCSI Tape Drives, Internal</b> Ultrium 232 Ultrium 448 Ultrium 460 Ultrium 920 Ultrium 960 DAT 40 DAT 72 DLT VS160 SDLT 600	A-D	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
<b>HP StorageWorks Tape Drives, SAS Internal</b> Ultrium 448 SAS Ultrium 920 SAS	A-D	HP 8 Internal Port SAS HBA with RAID 0/1 <b>NOTE:</b> Please visit <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a> for details about minimum SAS controller firmware version and SAS cabling requirements.	347786-B21
<b>HP StorageWorks Tape Drives, SCSI External</b> Ultrium 232 Ultrium 448 Ultrium 460 Ultrium 920 Ultrium 960 DAT 40 DAT 72 DLT VS160 SDLT 600	External	HP SC11Xe Host Bus Adapter	412911-B21
<b>HP StorageWorks Tape Drives, SAS External</b> Ultrium 448 SAS Ultrium 920 SAS	External	HP 8 Internal Port SAS HBA with RAID 0/1 <b>NOTE:</b> Please visit <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a> for details about minimum SAS controller firmware version and SAS cabling requirements.	347786-B21
<b>HP StorageWorks SCSI Rack-Mount Tape Drive Enclosures</b> 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP SC11Xe Host Bus Adapter	412911-B21
<b>HP StorageWorks USB Rack-Mount Tape Drive Enclosures</b> 1U Rack-Mount Kit	External	USB 2.0 port	N/A

### Storage

<b>HP StorageWorks SAS Rack-Mount Tape Drive Enclosures</b> 1U Rack-Mount Kit	External	HP 8 Internal Port SAS HBA with RAID 0/1  <b>NOTE:</b> Please visit <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a> for details about minimum SAS controller firmware version and SAS cabling requirements.	347786-B21
<b>HP StorageWorks Autoloaders, External</b> DAT 72x10 Autoloader 1/8 Tape Autoloader	External	HP SC11Xe Host Bus Adapter  64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	412911-B21 374654-B21
<b>HP StorageWorks Tape Libraries, External</b> MSL2024 (Ultrium 448 Ultrium 920 and 960-based) MSL4048 (Ultrium 448 and 960-based) MSL6000 (Ultrium 960 and 460-based) MSL6000 (SDLT 600-based)	External	Please consult the EBS connectivity matrix at <a href="http://www.hp.com/go/ebs">http://www.hp.com/go/ebs</a> for detailed connectivity information.	N/A

### Power Specifications

Part Number	380622-001
Spare Kit	403781-001
Operational Input Voltage Range (V rms)	90 - 264
Frequency Range (Nominal) (Hz)	47 - 63 (50 / 60)

Nominal Input Voltage (Vrms)	100	120	208	220	230	240
Max Rated Output Wattage Rating	800	950	1000	1000	1000	1000
Nominal Input Current (A rms)	10.0	8.8	5.85	5.5	5.2	4.97
Max Rated Input Wattage Rating (Watts)	980	1035	1193	1186	1172	1169
Max. Rated VA (Volt-Amp)	1000	1056	1217	1210	1196	1193
Efficiency (%)	81.5	82	84	84	85	85.5
Power Factor	0.98	0.98	0.98	0.98	0.98	0.98
Leakage Current (mA)	0.44	0.52	0.91	0.96	1.00	1.04
Maximum Inrush Current (A peak)	30	30	30	30	30	30
Maximum Inrush Current duration (milliseconds)	3	3	3	3	3	3

#### NOTES:

ActiveAnswers Power Calculation

Power calculator is LIVE on ActiveAnswers Web site. This is an external link.

Follow this link: <http://h30099.www3.hp.com/configurator/powercalcs.asp>

To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: ML350 G5
- Click on: "Power Calculator" link. (You may need to scroll down to see it)

### Technical Specifications

<b>System Unit - Tower</b>	<b>Dimensions (HxWxD)</b> (with feet/bezel)	18.4 x 8.58 x 23.5 in. (46.8 x 21.8 x 59.6cm)
	<b>Weight (approximate)</b>	60 lb (27.24 kg) (without hard drives)
	<b>Input Requirements</b> (per power supply)	Rated Line Voltage 100-120 VAC / 200-240VAC Rated Input Frequency 50 Hz to 60 Hz Input Power <1000W @ 90VAC <1050W @ 115VAC <1205W @ 180VAC Rated Input Current 10A(100VAC),6.7A(200VAC)
	<b>Rated Line Frequency</b>	50 to 60 Hz
	<b>BTU Rating</b>	4112BTU/hr 180VAC
	<b>Power Supply Output Power</b> (per power supply)	Rated Steady-State Power 800W at 120V or 1000W at 220V
	<b>Temperature Range</b>	Operating 50° to 95° F (10° to 35° C) (No direct sustaining sunlight) Storage (up to one year) -40° to 158° F (-40° to 70° C)
	<b>Maximum Wet Bulb Temperature</b>	82.4° F (28° C)
	<b>Relative Humidity</b> (non-condensing)	Operating 10% to 90% Non-operating 5% to 90%
	<b>Acoustic Noise</b>	Idle (Fixed Disk Drives Spinning) L WAd (BELS) 5.0 L pAm (dBA) 33 Operating (Random Seek to Fixed Disks) L WAd (BELS) 5.1 L pAm (dBA) 33

<b>System Unit - Rack</b>	<b>Dimensions (HxWxD)</b>	8.54 x 17.5 x 21.9 in. (21.7 x 44.5 x 55.7cm)
	<b>Weight (approximate)</b>	60 lb (27.24 kg) (without hard drives)
	<b>Input Requirements</b> (per power supply)	Rated Line Voltage 100-120 VAC / 200-240VAC Rated Input Frequency 50 Hz to 60 Hz Input Power <1000W @ 90VAC <1050W @ 115VAC <1205W @ 180VAC Rated Input Current 10A(100VAC),6.7A(200VAC)
	<b>Rated Line Frequency</b>	50 to 60 Hz
	<b>BTU Rating</b>	4112 BTU/hr 180VAC
	<b>Power Supply Output Power</b> (per power supply)	Rated Steady-State Power 800W at 120V or 1000W at 220V
	<b>Temperature Range</b>	Operating 50° to 95° F (10° to 35° C) (No direct sustaining sunlight) Storage (up to one year) -40° to 158° F (-40° to 70° C)

### Technical Specifications

<b>Maximum Wet Bulb Temperature</b>	82.4° F (28° C)	
<b>Relative Humidity (non-condensing)</b>	Operating	10% to 90%
	Non-operating	5% to 90%
<b>Acoustic Noise</b>	Idle (Fixed Disk Drives Spinning)	
	L WAd (BELS)	5.0
	L pAm (dBA)	33
	Operating (Random Seek to Fixed Disks)	
	L WAd (BELS)	5.1
	L pAm (dBA)	33

<b>Smart Array E200i Controller</b>	<b>Disk Drive and Enclosure Interface</b>	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)
	<b>SAS Connectors</b>	2 internal (SFF8484) x4 wide port connectors
	<b>Cache Memory Speed</b>	DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth.
	<b>Server Interface</b>	x4 2.5G PCIe provides 2GB/s maximum bandwidth.
	<b>SAS Speed</b>	x8 3G SAS provides 2.4GB/s maximum bandwidth.
	<b>Cache Memory</b>	40-bit 64MB ECC read cache or 40-bit 128MB ECC battery backed, transportable read/write cache
	<b>Logical Volumes Supported</b>	Up to 32 logical volumes
	<b>Maximum Volume Capacity</b>	4.5TB (6 x 750GB SATA)
	<b>Host Memory Addressing</b>	64-bit, supporting greater than 4GB server memory space
	<b>RAID Support</b>	RAID 5 (Distributed Data Guarding) RAID 1, 1+0 (Striping & Mirroring) RAID 0 (Striping)
	<b>Upgradeable Firmware</b>	Upgradeable Firmware

### Technical Specifications

<b>Embedded NC373i Multifunction Gigabit Server Adapter</b>	<b>Network Interface</b>	10Base-T/100Base-TX/1000Base-TX
	<b>Compatibility</b>	IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX
	<b>Data Transfer Method</b>	PCI Express, four lanes (x4)
	<b>Network Transfer Rate</b>	10Base-T (Half-Duplex) 10 Mb/s 10Base-T (Full-Duplex) 20 Mb/s 100Base-TX (Half-Duplex) 100 Mb/s 100Base-TX (Full-Duplex) 200 Mb/s 1000Base-TX (Half and Full-Duplex) 2000 Mb/s
	<b>Connector</b>	RJ-45
	<b>Cable Support</b>	10Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m) 10/100/1000Base-TX Category 5 UTP; up to 328 ft (100 m)

© Copyright 2006 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.